



		1	2	
ON ↑ 	I	ON	ON	100%
	II	ON	-	75%
	III	-	ON	50%
	IV	-	-	25%

Detection area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application .


Factory setting: I

		3	4	5	
ON ↑ 	I	ON	ON	ON	5S
	II	-	ON	ON	30S
	III	ON	-	ON	90S
	IV	-	-	ON	3min
	V	ON	ON	-	20min
	VI	-	-	-	+∞

Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.


Factory setting: VI

		6	7	8	
ON ↑ 	I	ON	ON	ON	0S
	II	-	ON	ON	5S
	III	ON	-	ON	5min
	IV	-	-	ON	10min
	V	ON	ON	-	30min
	VI	-	ON	-	1h
	VII	-	-	-	+∞

Stand-by period

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people. When set to Disable mode, the low light is maintained until motion is detected.


Factory setting: I

		1	2	
ON ↑ 	I	ON	ON	50%
	II	-	ON	30%
	III	ON	-	20%
	IV	-	-	10%

Stand-by dimming level

The low light level you would like to have after the hold time in the long absence of people.

Factory setting: I

		3	4	5	6	
ON ↑ 	I	ON	ON	ON	ON	5Lux
	II	-	ON	ON	ON	15Lux
	III	ON	-	ON	ON	30Lux
	IV	-	-	ON	ON	50Lux
	V	ON	ON	-	ON	100Lux
	VI	ON	ON	ON	-	150Lux
	VII	-	-	-	-	Disable

Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.

100lux, 100lux, 50lux: twilight operation, 10lux, 5lux: darkness operation only.

Note that daylight sensor is active only when lamp totally switches off.

Factory setting: VII

WARNING / AVERTISSEMENT

MIN 75°C SUPPLY CONDUCTOR

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

LES FILS D'ALIMENTATION 75°C MIN

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

CSC LED Pole Top Area Light Installation Instruction

Cautions:

1. Do not connect to a generator.
2. Abide by local laws and regulations.
3. Please turn off the power before installation or maintenance.
4. Proper grounding is required to ensure safety.
5. Ensure light faces down after installation.


Notice:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electrical knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark occur, please turn off the power immediately and notify relevant personnel.

Attention:



1. Please check shipping damage. If so, please contact distributor.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, install the fixture according to instructions.

Wiring Diagram & Mounting Condition Diagram:

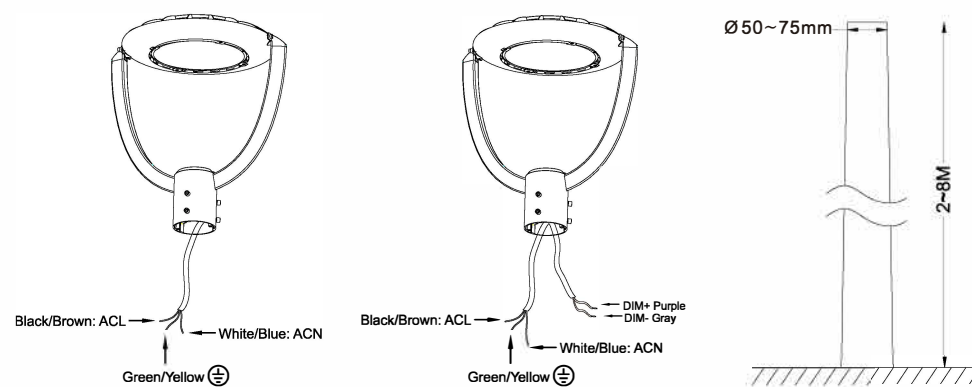


Installation steps :

1. Rotate the lamp body 90 degree to make sure light faces downward. (Figure 1)
2. Tighten screws on both sides of the bracket to fix the lamp body. Installation is finished when the lamp body is fixed and firm. (Figure 2)
3. Loosen the screws with a wrench. (Figure 3)
4. Connect the lamp to a utility power according to the wiring standard, and make sure conductors are firmly connected. (Figure 4)
5. Install the lamp to the pole, adjust the viewing angle, then tighten the screws with a wrench. (Figure 5)

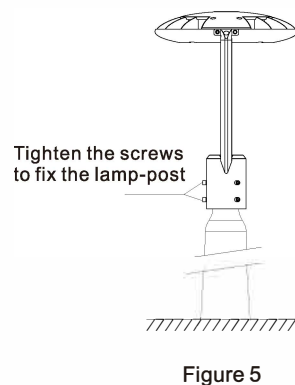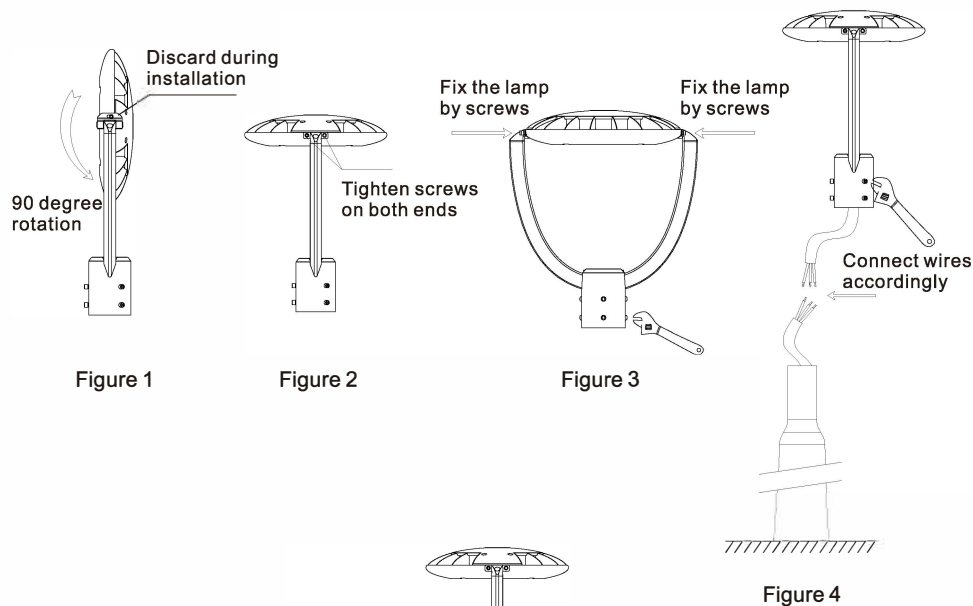

Instructions for Photocell



When the photocell function is required, the photocell should be installed on the back of lamp. When it's not required, a shorting cap should be installed on the back of the lamp.

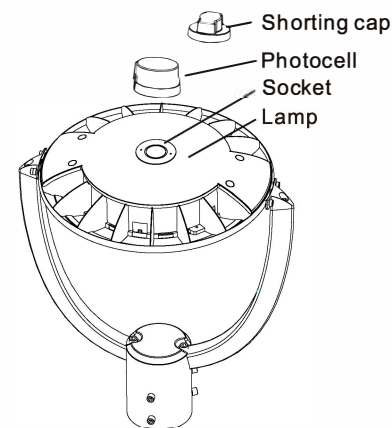


Adjust the color temperature through the switch:

Move the switch left and right to get the desired color temperature.

Press button to cycle through to desired colour temperature.



Structure of motion sensor (if equipped)

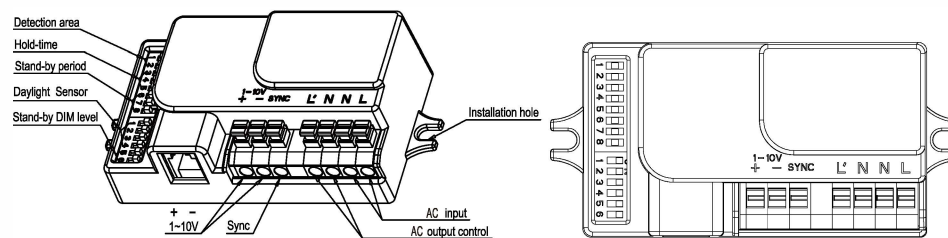

Setting:

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.