

Please Note:

1. Solar powered flood lights must be installed in a location with plenty of sunshine.
2. Lighting time will vary depending upon the amount of sun light received and current weather conditions.
3. Not recommended for sustained ambient temperatures below -20°C.
4. Flood light will automatically begin operation in the mode selected at dusk.
5. Recommended installation height is three (3) to four (4) metres.
6. The flood light is equipped with an internal user replaceable battery pack. Please contact your distributor for replacement.
7. After removing or replacing a battery pack, place solar panel in a sunny location or a bright light to activate the flood light.



For more information or to learn more,
please email info@csc-led.com

www.csc-led.com



Solar LED Flood Light with Dual Motion Sensors

USER MANUAL



SFL-10W-7200-50K









Please read and follow all of the instructions.
Save this manual for future reference.

www.csc-led.com

Specifications:





Product Name	Solar LED Flood Light with Dual Motion Sensors
Product Number	SFL-10W-7200-50K
Wattage	10W
Lumens	1080
LEDs	SMD2835*60PCS
Li-ion Battery	18650/3.7V replaceable 7200mAh
Solar Panel	6Wp, Poly Crystalline Silicon
Lighting Panel	Adjustable 135°
Bracket	Adjustable 360° Yoke
IP Rating	IP65
Beam Angle	90°
Detection Angle / Area	180° ≤ 8 metres
Dimensions	300*215*35mm
Lifespan	35,000 Hours
Warranty	24-month (12-month Battery)

Features:


-  Solar Power
-  User Replaceable Battery
-  Automatic On / Off
-  Dual PIR Motion Sensors
-  3 Operating Modes
-  IP65

NOT RECOMMENDED FOR SUSTAINED AMBIENT TEMPERATURES BELOW -20°C

Operating Modes:

-  On/Off
-  20% Brightness: Automatically turns on at dusk and remains on at 20% brightness
-  Full Brightness + Dim: Automatically turns on to full brightness when motion is detected within 8 metres. After 20 seconds without motion being detected, light will remain at 3% brightness.
-  Full Brightness + Off: Automatically turns on to full brightness when motion is detected within 8 metres. Turns off after 30 seconds without motion being detected.

Installation Instructions:

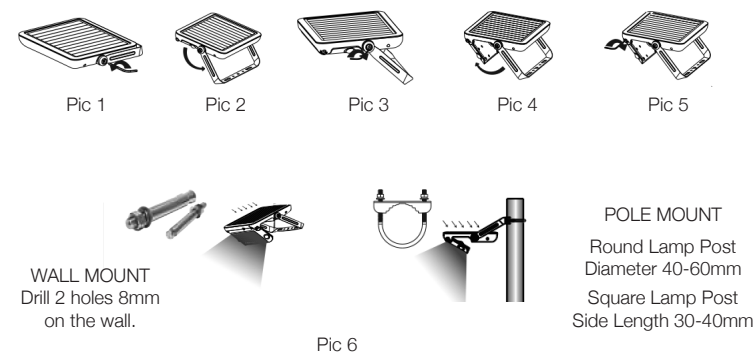

1. Use the allen wrench to loosen the bracket (pic 1).
2. Adjust to the appropriate angle (pic 2) and secure by tightening the screw provided (pic 3).
3. Move the light panel to the desired angle (pic 4) and secure by tightening the screw provided (pic 5).
4. Mount the lamp on to the wall or lamp-post (pic 6).