

## CES Series - Explosion Proof / Hazloc

Suitable for use in volatile gas and dust explosive environments  
Instant on with no warm-up time

cUL 8750 rated  
for Class 1, Div 2  
groups A, B, C, D

120° Beam angle



Bridgelux USA LED light engine  
emits a fraction of the heat  
of HID luminaires

Optical grade  
borosilicate glass

Uses up to 75% less energy than common legacy type luminaires  
U-bracket and 1m cord included


# CES Series - Explosion Proof / Hazloc

Suitable for volatile gas and dust explosive environments




PRODUCT #	WATTS	VOLTAGE	CCT	LUMENS	COLOUR	CTN QTY
CES-J40S	30W	120-277V	5000K	3,188 lm	White	1
CES-J100	100W	120-277V	5000K	11,826 lm	White	1
CES-J200	185W	120-277V	5000k	21,761 lm	White	1

CES-J40S

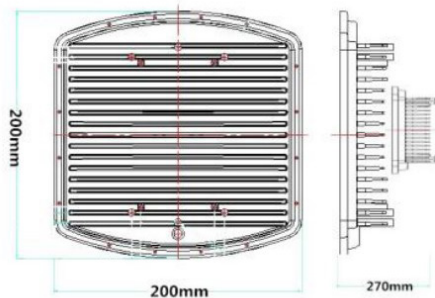

CES-J100

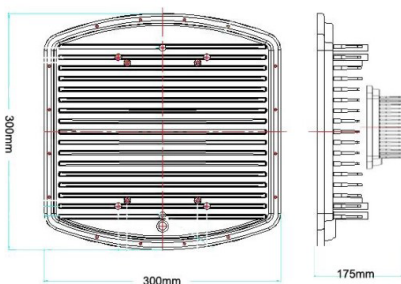

CES-J200

