


# Photocell (347)

## with Microprocessor Circuits

Ideal for automatically controlling the outdoor lighting in accordance with the ambient natural lighting level

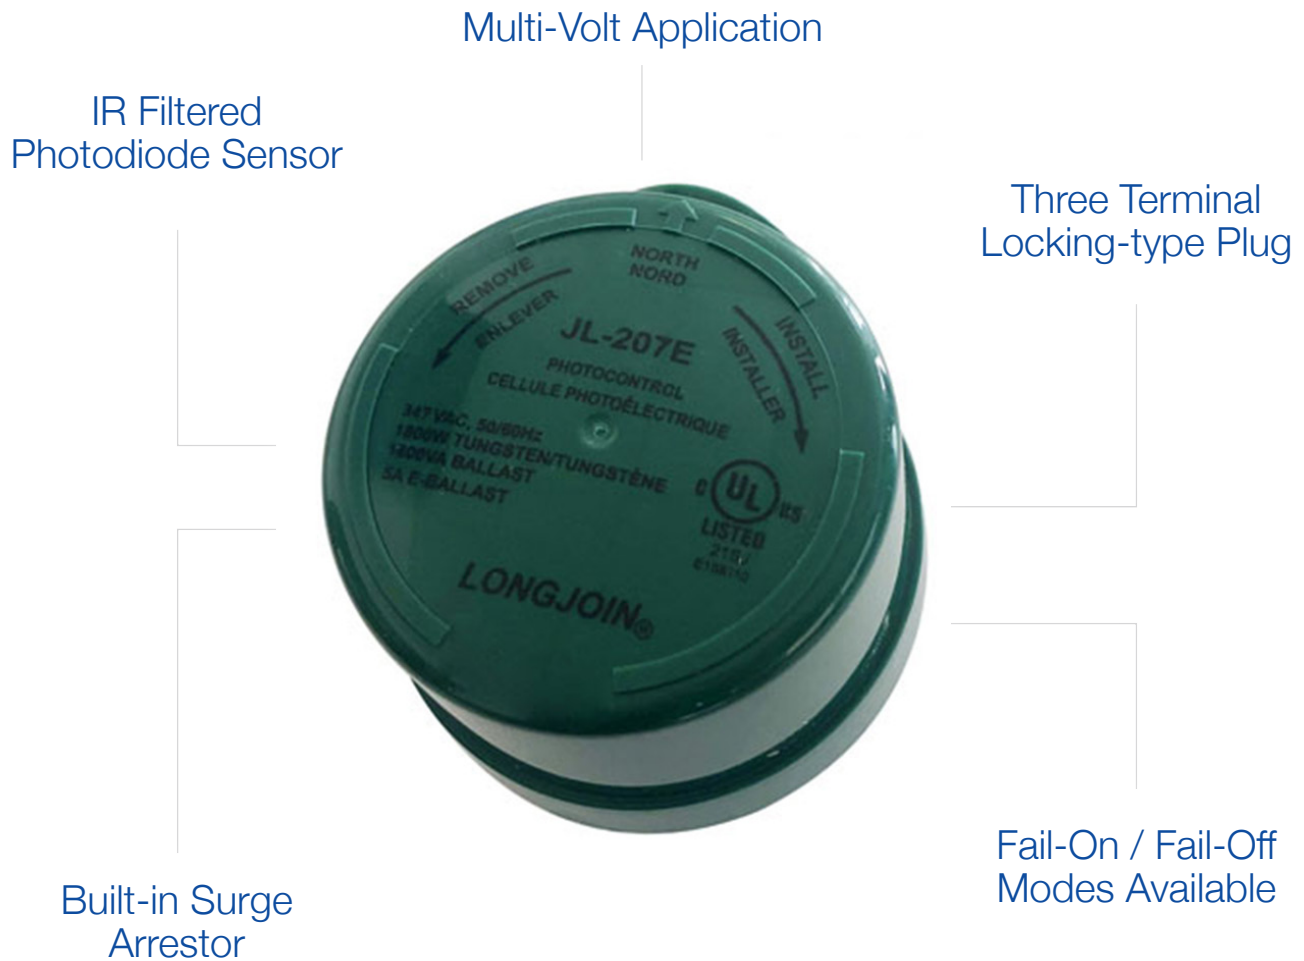

Optional Photocell Receptacle (JL-200) sold separately




## TECHNICAL DATA

### TECHNICAL PARAMETERS

Rated Voltage	347V
Rated Frequency	50/60Hz
Rated Loading	1000W Tungsten 1800V Ballast
Power Consumption	0.5W [STD] / 0.9W [HP]
Operating Temp	-40°C to 70°C
IP Rating	IP67
Approx Weight	100g [STD] / 125g [HP]
On/Off Level	61x on 501x off

### DIMENSIONS

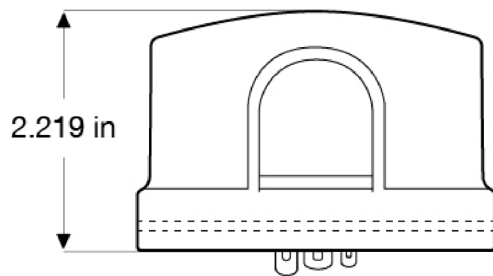

### INSTALLATION

Disconnect power; wire the receptacle according to the diagram in right hand. Push the photocontroller on and twist it clockwise to lock it into the receptacle.

Install the photocontroller with the Photocell facing the NORTH direction as indicated on the top of the photocontroller. Adjust the receptacle position is necessary.

