



 CSCLED

T-GRID LIGHTING

TBAR2-DM-35K

TBAR2-DM-40K

TBAR4-DM-35K

TBAR4-DM-40K

CSC LED T-GRID lighting with a frosted lens has a unique 3-sided design that allows light to diffuse for a direct and indirect lighting combination. The 120° beam angle aids in creating an architectural statement while distributing the lumens over the entire space.




FLEXIBLE LIGHTING SOLUTIONS

Design a custom pattern for your space!

CSC LED T-GRID lighting can be installed in many configurations by replacing any of the cross tees between the main runners of the grid ceiling assembly.


These configurations include "L" ,"T" ,"+" ,"□" and more.

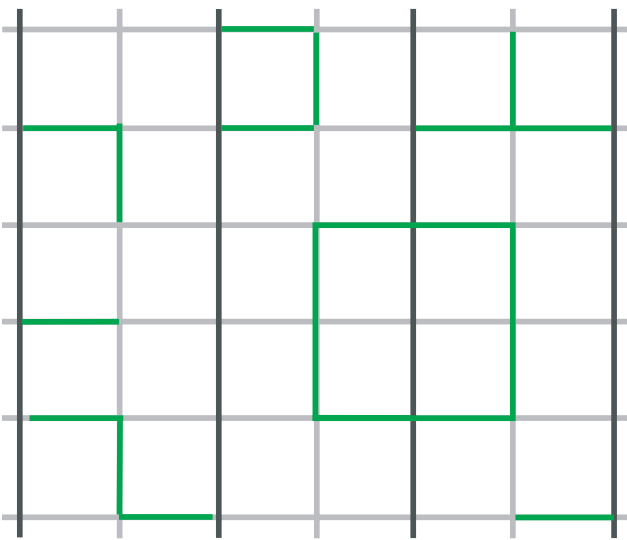


- Examples of configurations
- Possible positions for T-BAR LED light modules
- One-piece main runner cannot be replaced



DIMENSIONS

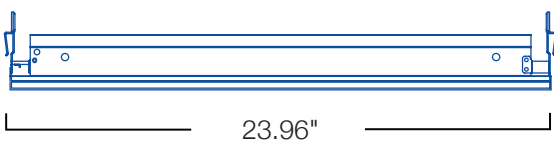


2 FT Models

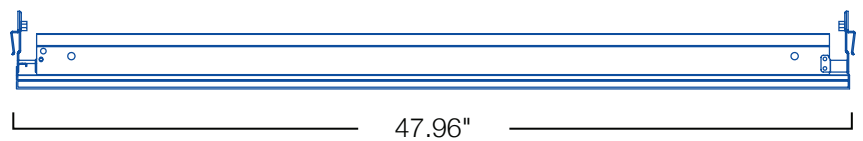

4 FT Models

SPECIFICATIONS



Remote Driver with RJ45 Terminal
saves labour costs and allows for quick and easy installation

Frosted Lens and 8 ft Power Cable with RJ45 Jack



Seamless Integration
into suspended ceilings allows unique and elegant architectural lighting designs

Slim Profile
0.48" thickness

15/16"

APPLICATIONS

A flexible lighting solution for commercial and institutional buildings such as office buildings, schools, and other spaces that can benefit from a unique and elegant architectural lighting design.

DRIVER

T-GRID lighting can be parallel connected up to 6' (2' fixture) and 12' (4' fixture) max per power supply. Max distance from fixtures to power supply is 8' with 24 AWG wire with RJ45 terminal.

MOUNTING

Universal mounting brackets are widely compatible with various T-GRIDS and are easy to install in standard 15/16" suspension systems.

Order Code	Length	Grid Type	Wattage	CCT	Voltage	Lumens	Efficacy	Beam Angle
TBAR2-DM-35K	2 FT	15/16"	10W	3500K	120-277V	1,300 lm	130 lm/W	120°
TBAR2-DM-40K	2 FT	15/16"	10W	4000K	120-277V	1,300 lm	130 lm/W	120°
TBAR4-DM-35K	4 FT	15/16"	20W	3500K	120-277V	2,600 lm	130 lm/W	120°
TBAR4-DM-40K	4 FT	15/16"	20W	4000K	120-277V	2,600 lm	130 lm/W	120°

Power Supplies required for connecting 3 pieces of T-Grid Lighting (sold separately)	
TBAR-PS-30W	Power Supply for 2' T-Grid Lighting (Powers 3 pieces)
TBAR-PS-60W	Power Supply for 4' T-Grid Lighting (Powers 3 pieces)



ADDITIONAL T-GRID SIZES AVAILABLE THROUGH SPECIAL ORDER.
Email info@csc-led.com or talk to your local sales agent to learn more.



Industrial and Commercial LED Lighting

1-888-900-9885 | info@csc-led.com | www.csc-led.com

HEAD OFFICE

8-540 Jamieson Parkway
Cambridge, ON N3C 0G5
orders@csc-led.com

AB WAREHOUSE

13-2355 52nd Ave SE
Calgary, AB T2C 4X7
ordersbc@csc-led.com

BC OFFICE

1140-2375 Fremont Street
Port Coquitlam, BC V3B 0N9
ordersbc@csc-led.com

SALES AGENCIES

BRITISH COLUMBIA

Ken Watt & Associates
P: (604) 576-2838
www.kenwattassoc.com

MANITOBA

TMC Sales
P: (204) 837-5036
www.tmcsales.ca

ALBERTA / SASKATCHEWAN

Sensible Adaptive Solutions
P: (403) 519-4209
P: (403) 869-8252
www.sensibleadaptive.com

ONTARIO

Roney Marketing Ltd.
P: (905) 595-1344
www.roneymk.com

NEWFOUNDLAND AND LABRADOR

RWM Enterprises
P: (709) 682-4012

QUÉBEC

Ricard Agency
P: (514) 838-5625
www.agencericard.com

MARITIMES

Catalyst Sales and Marketing
P: (902) 266-3899
www.catalystsales.ca