


Architectural Linear Strip

40W | CCT Selectable | 120-347V | 4ft

Elevate your space by creating your own custom lighting design
Ideal for use in offices, conference rooms, hallways, educational facilities, and more



Flexible Mounting Options
(T Bar, Recessed, Suspension, and Wall Mount kits sold separately)

CCT Selectable
(3000K/3500K/4000K)

Damp Location Rated

0-10V Dimmable

4 Backlit Connector Options Available
to help you create your own seamless and unique design

Polycarbonate Frosted Lens
optional deep cell Louver available

31.5" Power Cord With Dimming Cables
connects to input power or other luminaires in row mounting applications





TECHNICAL DATA


LIGHT SPECIFICATIONS

Lumens	4,608 lm
Efficacy	111 lm/W
CCT	Selectable (30K/35K/40K)
CRI	83
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS


cUL	E482965
-----	---------

DIMENSIONAL DRAWING

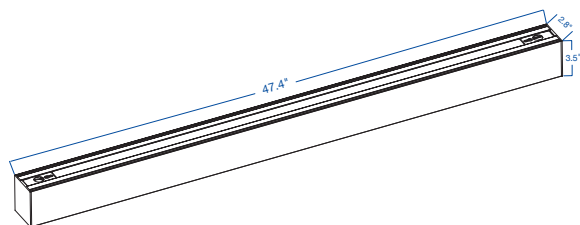

CONNECTORS (Sold Separately)

AL-120-CON	120° Connector
AL-L-CON	90° Connector
AL-T-CON	T Connector
AL-X-CON	X Connector

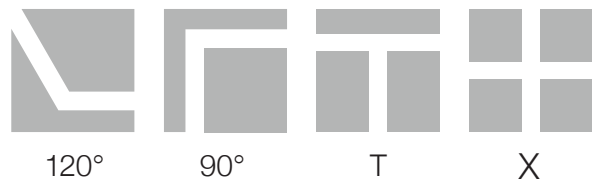

NOTE: All Connectors require Connection Kits (AL-C-KIT). Please refer to the connector product sheets to learn more.

ELECTRICAL

Wattage	40W
Voltage	120-347V
Current	0.43A
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	6.4%
Operating Temp	-30°C to 40°C

CONSTRUCTION

Power Cord	55"
Housing	Aluminum
Finish Colour	White
Lens	Polycarbonate
IP Rating	IP20 (Damp Location)

DIMENSIONS AND WEIGHTS

Product Dimensions	47.4" x 2.8" x 3.5"
Fixture Weight	6.6 lbs
Carton Qty	1
Carton Gross Weight	7.49 lbs
Carton Dimensions	48.2" x 3.7" x 3"
Master Carton Qty	6
Master Carton Gross Weight	41.9 lbs
Master Carton Dimensions	48.2" x 11.8" x 6.9"

KITS AND MOUNTING (Sold Separately)

AL-C-KIT	Connection Kit
AL-L-KIT	Louver Kit
AL-MR-KIT	Mud-In Recessed Kit
AL-R-KIT	Recessed Kit
AL-S-KIT	Suspension Kit
AL-WM-KIT	Wall Mount Kit
AL-TB-KIT	T Bar Mounting Kit