

Architectural Linear Strip

80W | CCT Tunable | 120-347V | 8ft

Elevate your space by creating your own custom lighting design
Ideal for use in offices, conference rooms, hallways, educational facilities, and more

CCT Tunable
(3000K/3500K/4000K)

100" Power Cord
Included

Flexible
Mounting Options
(T Bar, Recessed,
Suspension, and
Wall Mount kits
sold separately)

Damp
Location Rated



4 Backlit
Connector
Options Available
to help you create your
own seamless and
unique design

Polycarbonate
Frosted Lens
Optional deep cell
Louver available

0-10V Dimmable





TECHNICAL DATA


LIGHT SPECIFICATIONS

Lumens	9,263 lm @ 3000K
Efficacy	112.76 lm/W
CCT	Tunable (30K/35K/40K)
CRI	83
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
-----	---------

DIMENSIONAL DRAWING

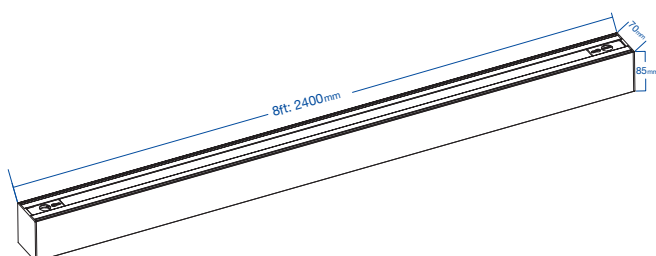

CONNECTORS (Sold Separately)

AL-120-CON	120° Connector
AL-L-CON	90° Connector
AL-T-CON	T Connector
AL-X-CON	X Connector



ELECTRICAL

Wattage	80W
Voltage	120-347V
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	6.1%
Operating Temp	-30 to 40°C

CONSTRUCTION

Power Cord	100"
Housing	Aluminum
Finish Colour	White
Lens	Polycarbonate
IP Rating	Damp Location

DIMENSIONS AND WEIGHTS

Fixture Net Weight	5.12 kgs
Pieces Per Carton	4
Carton Net Weight	20.5 kgs
Carton Gross Weight	23 kgs
Carton Meas.	2440 x 200 x 175 mm

KITS AND MOUNTING (Sold Separately)

AL-C-KIT	Connection Kit
*AL-L-KIT	Louver Kit
*AL-MR-KIT	Mud-In Recessed Kit
*AL-R-KIT	Recessed Kit
AL-S-KIT	Suspension Kit
AL-WM-KIT	Wall Mount Kit
AL-TB-KIT	T Bar Mounting Kit

* Requires x2 kits for use with 8' fixtures (sold separately)

NOTE: All Connectors require Connection Kits (AL-C-KIT). Please refer to the connector product sheets to learn more.