

# Architectural Wall Pack

50W | 4000K | 120-277V



High-end style with super bright, energy efficient LEDs  
Ideal for building entrances, multi-use facilities, apartment buildings,  
institutions, schools, stairways and loading docks



## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	5,193 lm
Efficacy	104.5 lm/W
CCT	4000K
CRI	83.5
Beam Angle	90 x 120
L70 Life	50,000 hrs
Dimmable	No
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E482965
DLC	PAS1D9W1


### ELECTRICAL

Wattage	50W
Voltage	120-277V
Power Factor	0.91
THD	13.69%
Operating Temp	-40 to 40°C


### CONSTRUCTION

Housing	Aluminum
Finish	Multi-coat, powder
Colour	White
IP Rating	IP65
Weight	4.5 lbs
Carton Qty	4


### ILLUMINANCE AT A DISTANCE

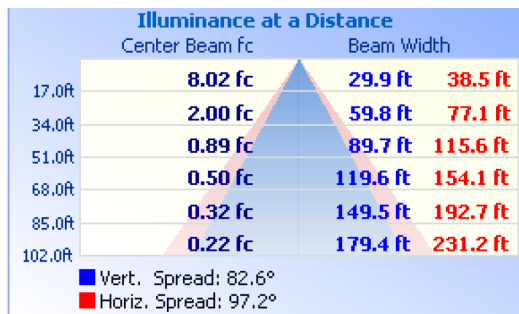

### ISOCANDELA PLOT

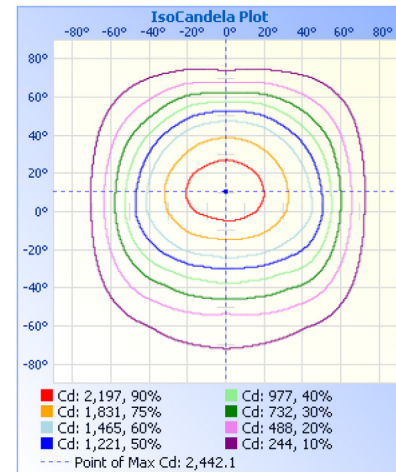

### DIMENSIONS

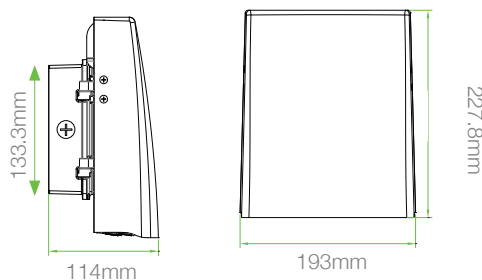

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)