ORDER CODE:




AWP03 **Architectural Wall Pack**



20W | 4000K | 120-277V

Versatile architectural wall pack with a slim profile that fits almost any outdoor lighting application Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools, and more

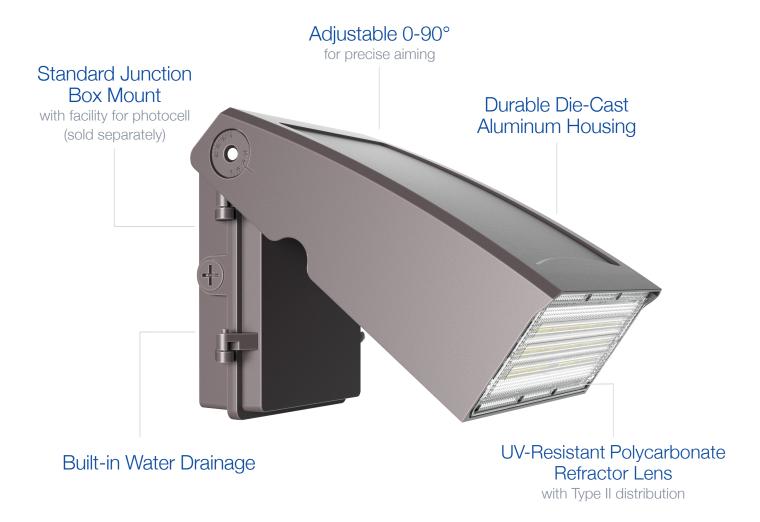

TECHNICAL DATA






LIGHT SPECIFICATIONS

| Lumens | 2,593 lm |
|----------|------------|
| Efficacy | 133.6 lm/W |
| CCT | 4000K |
| CRI | 72 |
| Dimmable | 0-10V |
| L70 Life | 50,000 hrs |
| Warranty | 10-year |


APPROVALS AND LISTINGS

| cETL | 5018387 |
|------|--------------|
| DLC | PLFXYUETSHXF |

ISOCANDELA PLOT



LUMINOUS INTENSITY DISTRIBUTION




ELECTRICAL

| Wattage | 20W |
|----------------|-------------|
| Voltage | 120-277V |
| Power Factor | 0.9 |
| THD | 15.8% |
| Operating Temp | -30 to 45°C |


CONSTRUCTION

| Housing | Die-Cast Aluminum |
|-------------------|--------------------|
| Lens | Polycarbonate |
| Finish | Bronze |
| IP Rating | IP65 |
| Net Weight | 1.45 kg |
| Gross Weight | 1.78 kg |
| Carton Qty | 1 |
| Carton Dimensions | 245 x 200 x 135 mm |

DIMENSIONS



SPECTRORADIOMETRIC PARAMETERS



Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com

