

AWP04 Architectural Wall Pack

Power Selectable | 4000K | 120-347V

Meet the successor to our AWP03 series Wall Packs, **now power selectable!**

Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools, and more

Power Selectable
60W/80W/100W/120W


Adjustable 0-90°
for precise aiming



Durable Die-Cast
Aluminum Housing

Built-in Water
Drainage

Standard Junction
Box Mount
with facility for photocell
(sold separately)

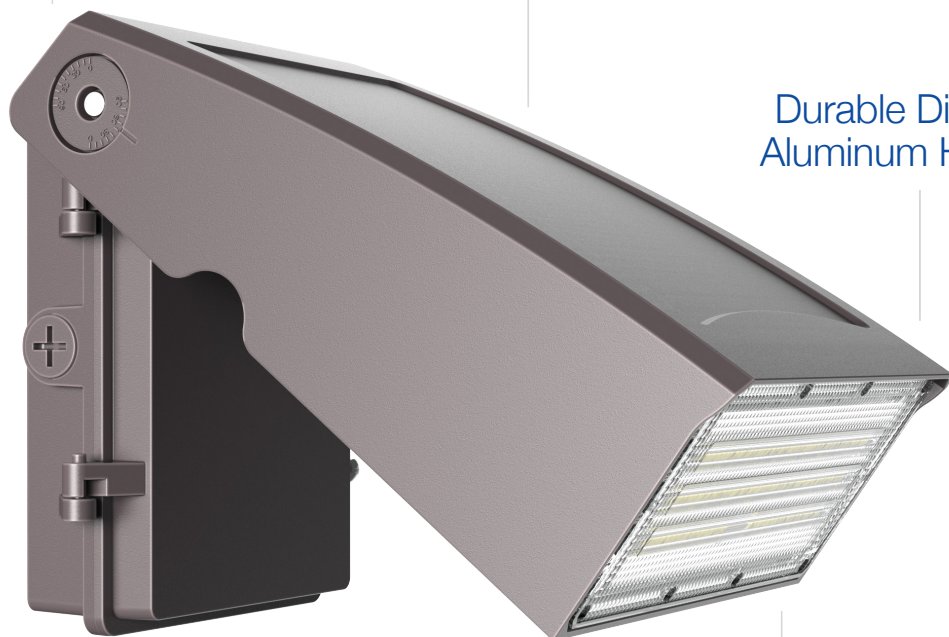

UV-Resistant Polycarbonate
Refractor Lens
with Type II distribution

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	15,960 lm
Efficacy	133 lm/W
CCT	4000K
CRI	70
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


APPROVALS AND LISTINGS

cETL	5018387
DLC Premium	S-3B2G60

ISOCANDELA PLOT

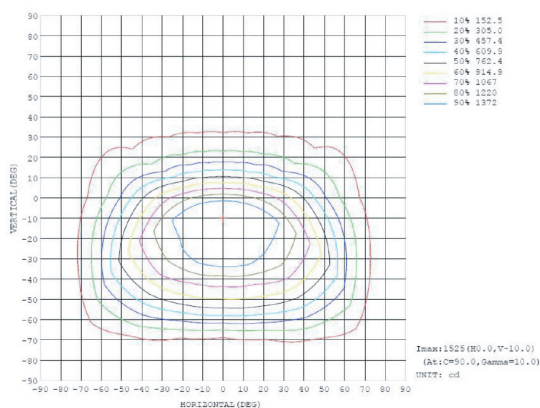

LUMINOUS INTENSITY DISTRIBUTION

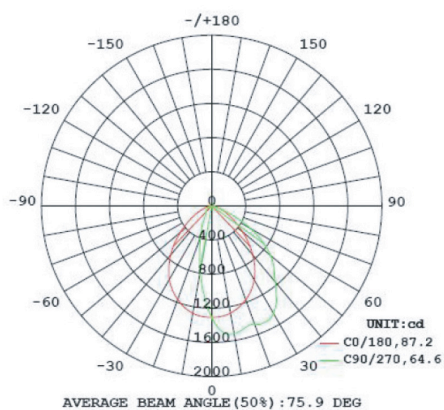


ELECTRICAL

Wattage	60W/80W/100W/120W
Voltage	120-347V
Current	1.6A
Power Factor	0.9
THD	15%
Operating Temp	-30 to 45°C


CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Bronze
IP Rating	IP65
Net Weight	3.53 kg
Gross Weight	4.13 kg
Carton Qty	1
Master Carton Dimensions	375 x 295 x 180 mm

DIMENSIONS

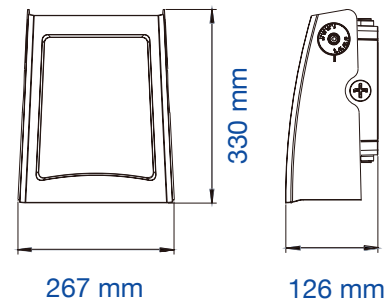

SPECTRORADIOMETRIC PARAMETERS

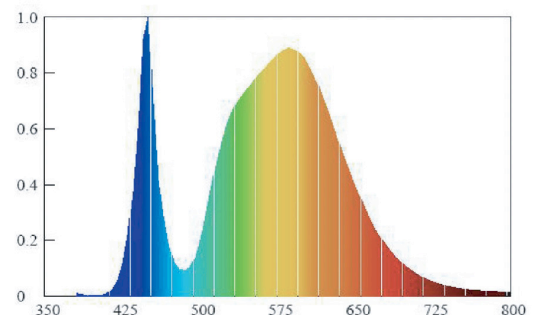

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com