CSCLED

Product # CWP02-80W-50K

# CWP02 80W Wall Pack

CWP02 series Wall Packs
Ideal for exterior security and entryway lighting

LM80 tested
Lumiled light engine

Purpose built
driver inside

Glass lens

Die-cast aluminum body

Photocell ready

# TECHNICAL DATA

## LIGHT SPECIFICATIONS

| | |
|---|---|
| Lumens | 11,652 lm |
| Efficacy | 150.39 lm/W |
| CCT | 5000K |
| CRI | 80 |
| Dimmable | 0-10V |
| Warranty | 10-year |

## APPROVALS AND LISTINGS

| | |
|---|---|
| cUL | E482965 |

## ILLUMINANCE AT A DISTANCE

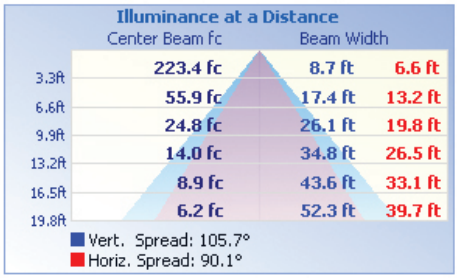


## ISOCANDELA PLOT

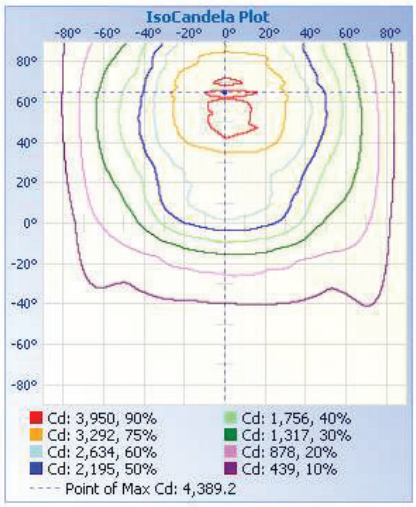


## ELECTRICAL

| | |
|---|---|
| Wattage | 80W |
| Voltage | 120-277V |
| Power factor | 0.90 |
| THD | 15% |
| Operating temp | -40° to 40°C |

## CONSTRUCTION

| | |
|---|---|
| Housing | Aluminum / Borosilicate glass |
| Colour | Bronze |
| IP rating | IP65 |
| Weight | 9.04 lbs |
| Carton qty | 1 |
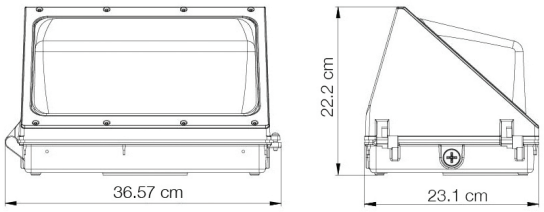
## DIMENSIONS