

# CWP03 60W Wall Pack, HV

## CWP03 Wall Packs

Ideal for security, warehouse, and entryway lighting

High impact polycarbonate optics  
for precision beam control  
and vandal resistance

Purpose-built  
LED driver inside



LM80 tested  
Lumiled chips

Heavy die-cast  
aluminum body

## TECHNICAL DATA



## LIGHT SPECIFICATIONS

Lumens	8,195 lm
Efficacy	136.92 lm/W
CCT	5000K
CRI	80
Dimmable	0-10V
Warranty	10-year

## APPROVALS AND LISTINGS


cUL	E482965
-----	---------

## ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
3.3ft	183.8 fc	9.3 ft	7.9 ft
6.6ft	46.0 fc	18.5 ft	15.8 ft
9.9ft	20.4 fc	27.8 ft	23.7 ft
13.2ft	11.5 fc	37.1 ft	31.6 ft
16.5ft	7.4 fc	46.3 ft	39.5 ft
19.8ft	5.1 fc	55.6 ft	47.5 ft

■ Vert. Spread: 109.1°  
 ■ Horiz. Spread: 100.3°

## ISOCANDELA PLOT

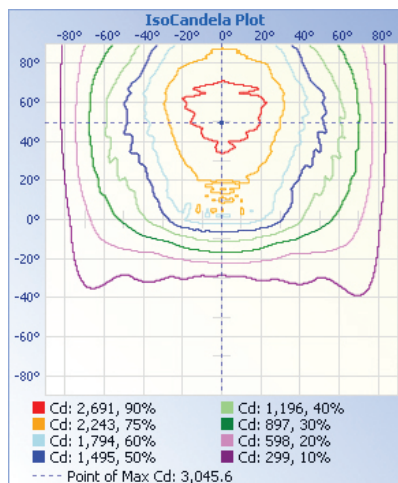

## ELECTRICAL

Wattage	60W
Voltage	277-480V
Power factor	0.9
THD	15.02%
Operating temp	-40° to 40°C

## CONSTRUCTION

Housing	Aluminum / Polycarbonate
Colour	Bronze
IP rating	IP65
Weight	6.45 lbs
Carton qty	1

## DIMENSIONS

