

Product #


FL01-150W-HA

WITH HORIZONTAL ARM



White finish available, order code: FL01-150W-HA-WH

## DIMENSIONS

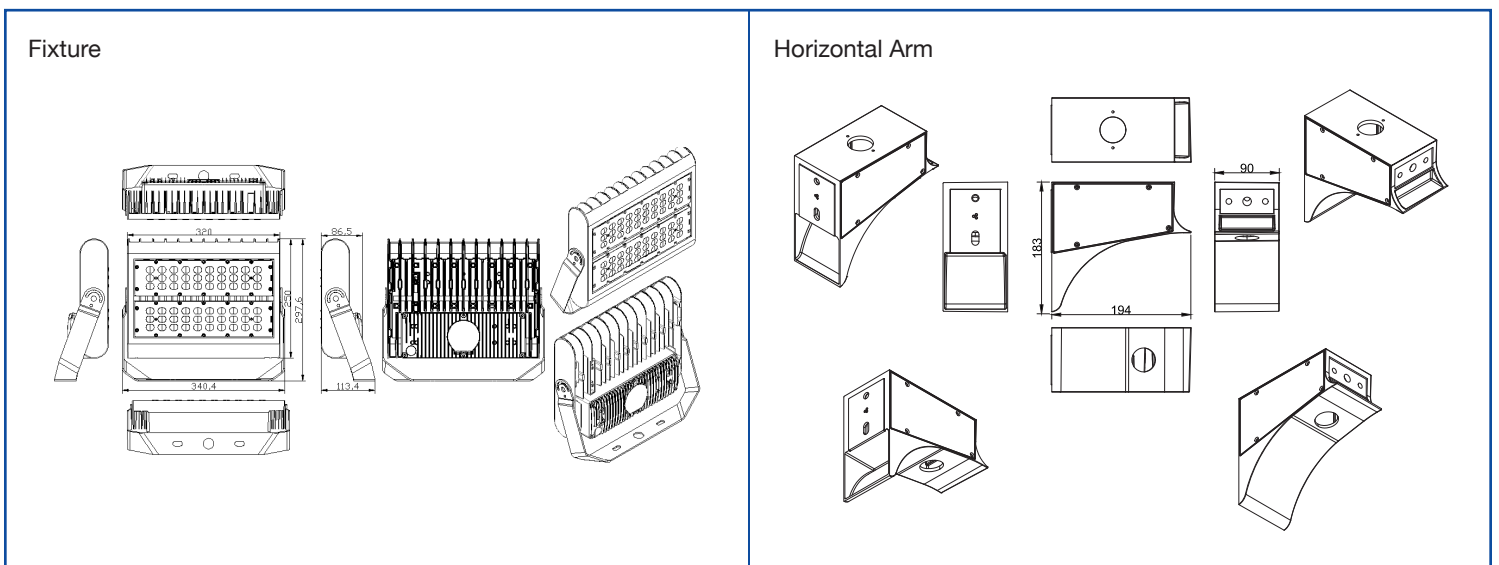

# 150W Flood Light



Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination and more



## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	18,752
Efficacy	123 lm/W
CCT	5000K
Beam angle	90 x 120°
CRI	82.3
Dimmable	0-10V dimmable
Rated hours	50,000
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E352127
DLC	PRTPFUA

### DIMENSIONS



### ILLUMINANCE AT A DISTANCE

Center Beam fc	Illuminance at a Distance	
	Beam Width	Beam Area
17.0ft	21.8 fc	33.6 ft 63.8 ft
34.0ft	5.4 fc	67.1 ft 127.7 ft
51.0ft	2.4 fc	100.7 ft 191.5 ft
68.0ft	1.4 fc	134.3 ft 255.3 ft
85.0ft	0.9 fc	167.8 ft 319.1 ft
102.0ft	0.6 fc	201.4 ft 383.0 ft

■ Vert. Spread: 89.3°  
■ Horiz. Spread: 123.9°

### ELECTRICAL

Wattage	150W
Voltage	120-277V
Power factor	0.93
THD	6.41
Operating temp	-40° to 55°C

### CONSTRUCTION

Housing	Aluminum
Finish	6mm, powder coat
Colour	Matte black
IP rating	IP65
Weight	13.4 -14.4 lbs
Carton qty	1

### NOTES

1m-cUL listed cable included

### PHOTOMETRIC SPECS

