

100W Flood / Area Light, 277-480V



FL04 Series

Sleek, streamlined design with premium performance


LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard



Highest Grade
Polycarbonate Optics

Type III Standard
Type V Available

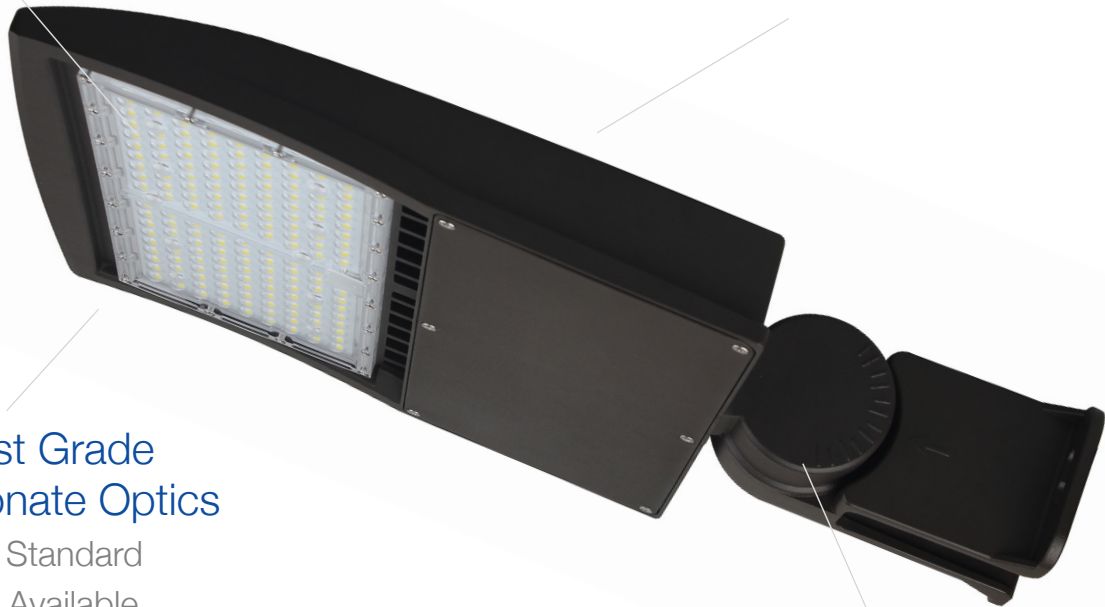

Trunnion Mount Standard

Field-Interchangeable:
Slip Fitter, Pole, or Multi-Mount
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Visor



FL04-SHIELD-SM

Photocell



FLPC-HV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	12,699 lm
Efficacy	126.18 lm/W
CCT	5000K
CRI	70
L70 Life	54,000
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PLLTWZH3ONDK

ILLUMINANCE AT A DISTANCE

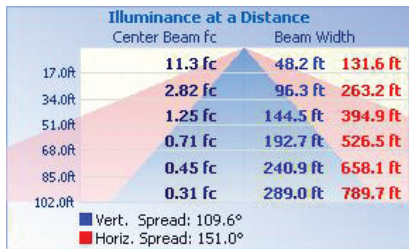

ISOCANDELA PLOT

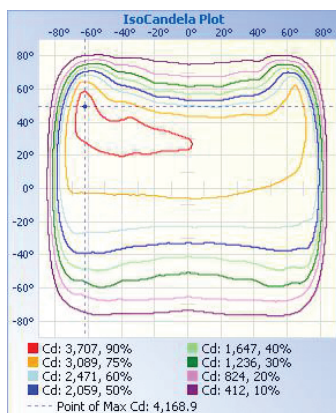

ELECTRICAL

Wattage	100W
Voltage	277-480V
Power factor	0.90
THD	15%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 1.13 ft ² Horizontal - 0.8 ft ² Vertical - 1.6 ft ²
Weight	10.58 lbs
Carton qty	1

DIMENSIONS

