

450W Flood / Area Light, 277-480V



FL04 Series

Sleek, streamlined design with premium performance

LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard



Highest Grade
Polycarbonate Optics

Type III Standard
Type V Available

Trunnion Mount Standard

Field-Interchangeable:
Slip Fitter, Pole, or Multi-Mount
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Photocell



FLPC-HV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	57,368 lm
Efficacy	129.19 lm/W
CCT	5000K
CRI	70
L70 Life	54,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLLS5F779U45

ILLUMINANCE AT A DISTANCE

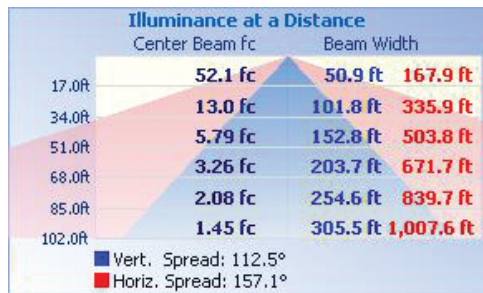


ELECTRICAL

Wattage	450W
Voltage	277-480V
Power factor	0.90
THD	15%
Operating temp	-40 to 40°C


CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 2.34 ft² Horizontal - 1.4 ft² Vertical - 3.2 ft²
Weight	27.3 lbs
Carton qty	1

DIMENSIONS

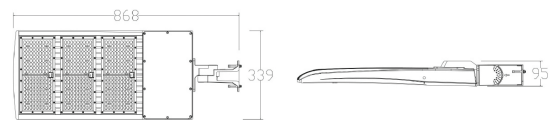

ISOCANDELA PLOT

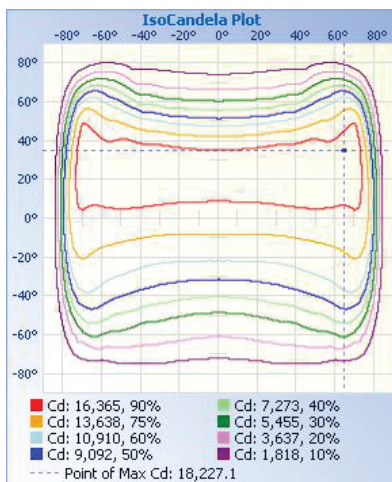

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com