

FL04B Flood / Area Light


100W | 4000K | 120-347V



TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

Removable Access Plate
for easy field installation of
twist lock photocell receptacle

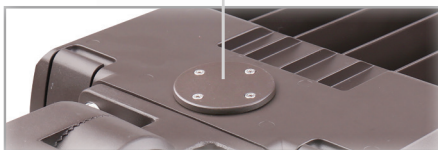

Type III Polycarbonate Optics
Type IV and V available

Rugged Die Cast Aluminum Housing
(Bronze)


Pre-wired for Optional Motion Sensor
(Sensor & remote sold separately)



HB01R



HB01DMS-A

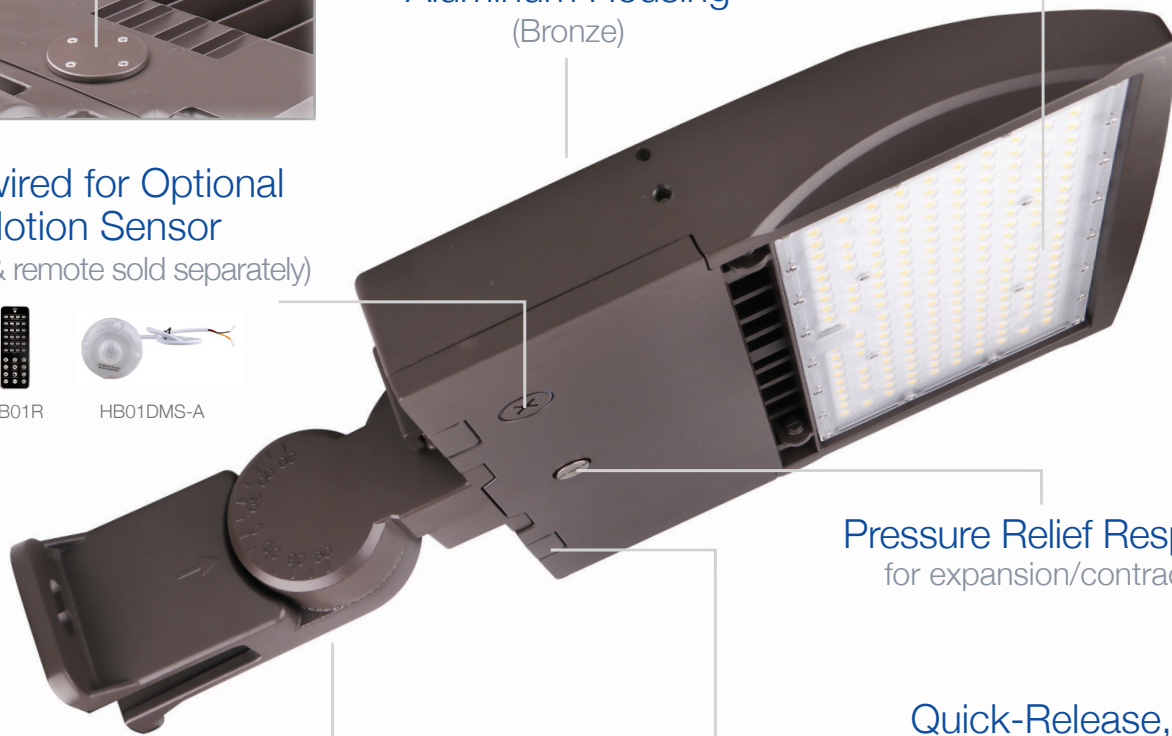

Pressure Relief Respirator
for expansion/contraction

Complete with Trunnion
Interchangeable mounting
options sold separately

Quick-Release, Hinged Access Cover
for control compartment

Accessories (Ordered Separately):

Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Type IV and V Optics, Photocell and Receptacle, Shield



FL04-YK-LG



FL04-SF



FL04-PM



FL04-MM



HB01R



HB01DMS-A

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	13,990 lm
Efficacy	145 lm/W
CCT	4000K
CRI	72
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PLUMERTCLV3Z


ISOCANDELA



ILLUMINANCE AT A DISTANCE



DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

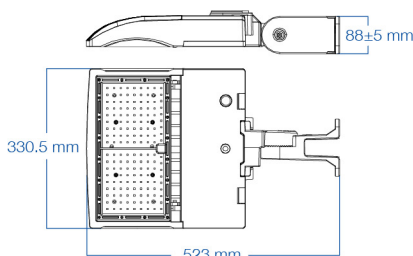

ELECTRICAL

Wattage	100W
Voltage	120-347V
Power Factor	0.9
THD	20%
Operating Temp	-30 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	1.32 ft²
Net Weight	5.22 kg
Gross Weight	5.92 kg
Carton Qty	1
Carton Dimensions	645 x 405 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Yoke Mount	FL04-YK-LG
Motion Sensor	HB01DMS-A
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V	JL-200 and JL-207E
Shield	FL04B-SHIELD-SM
Type IV Optics	FL04B-TYPE-IV
Type V Optics	FL04B-TYPE-V

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com