

PRODUCT CODE:

FL04B-150W-30K-UD

FL04B-150WJT3C1-BRYM30


FL04B Flood / Area Light 150W | 3000K | 120-347V





TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

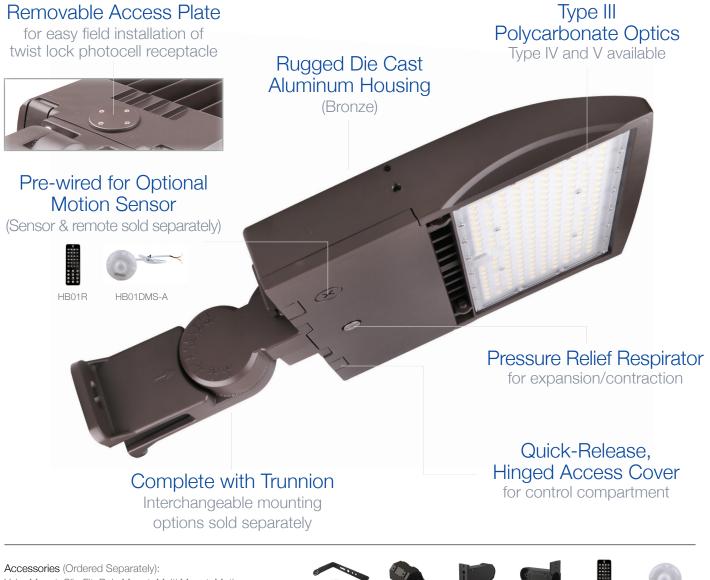

Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Type IV and V Optics, Photocell and Receptacle, Shield







HB01R

FI 04-MM

HB01DMS-A



www.csc-led.com

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	19,302 lm	
Efficacy	acy 131 lm/W	
CCT	3000K	
CRI	70	
L70 Life	50,000 hrs	
Dimmable	0-10V	
Warranty	10-year	

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLZZWDF8MBHK


DIMENSIONS (SHOWN WITH TRUNNION MOUNT)



ILLUMINANCE AT A DISTANCE

Illuminance at a Distance				
	Center Beam fc	Beam Width		
17.0ft	15.5 fc	57.8 ft 201.3 ft		
34.08	3.86 fc	115.6 ft 402.6 ft		
54.0R	1.72 fc	173.4 ft 603.8 ft		
	0.97 fc	231.2 ft 805.1 ft		
68.0ft	0.62 fc	289.0 ft 1,006.4 ft		
85.0 R	0.43 fc	346.8 ft 1,207.7 ft		
102.0R		340.0101,201.110		
Vert. Spread: 119.1° Horiz. Spread: 160.8°				

ISOCANDELA



ELECTRICAL

Wattage	150W	
Voltage	120-347V	
Power Factor	0.9	
THD	15%	
Operating Temp	-30 to 50°C	

CONSTRUCTION

Housing	Die-Cast Aluminum	
Cover	Polycarbonate	
Finish	Bronze	
IP Rating	IP65	
EPA	1.32 ft²	
Net Weight	6.36 kg	
Gross Weight	7.11 kg	
Carton Qty	1	
Carton Dimensions	690 x 380 x 155 mm	

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Yoke Mount	FL04-YK-LG
Motion Sensor	HB01DMS-A
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E
Shield	FL04B-SHIELD-SM
Type IV Optics	FL04B-TYPE-IV
Type V Optics	FL04B-TYPE-V

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com



8-540 Jamieson Parkway, Cambridge, ON Canada N3C 0G5 P: 519.880.9833 888.900.9885 E: info@csc-led.com orders@csc-led.com