CSCLED

ORDER CODE:	FL04B-150W-40K-UD
PRODUCT CODE:	FL04B-150WJT3C1-BRYM40

FL04B Flood / Area Light

150W | 4000K | 120-347V

FL04B CONCORDE

TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance
that brings a pleasing aesthetic to any project

Removable Access Plate
for easy field installation of
twist lock photocell receptacle

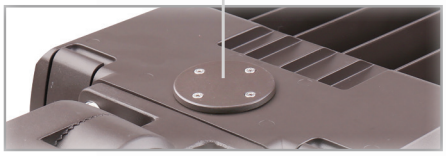

Rugged Die Cast Aluminum Housing
(Bronze)

Type III Polycarbonate Optics
Type IV and V available

Pre-wired for Optional Motion Sensor
(Sensor & remote sold separately)

HB01R

MS04-MW-TW-DC

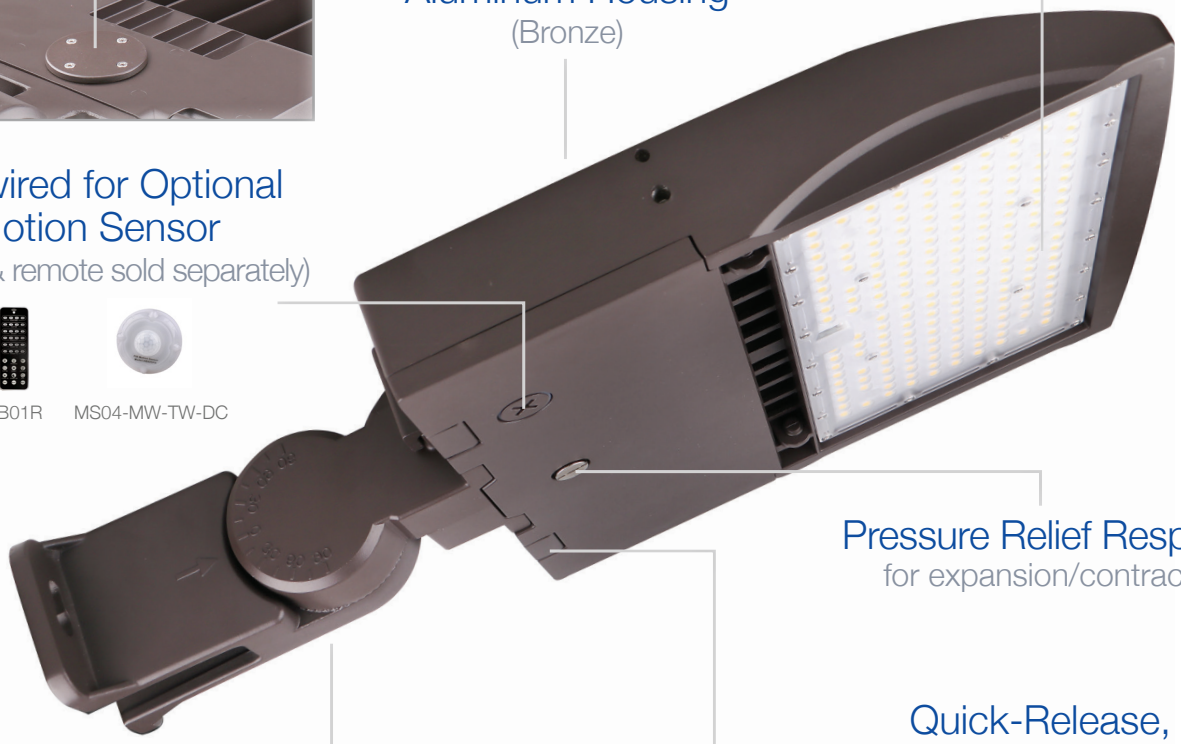

Pressure Relief Respirator
for expansion/contraction

Quick-Release, Hinged Access Cover
for control compartment

Complete with Trunnion
Interchangeable mounting
options sold separately

Accessories (Ordered Separately):
Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Type IV and V Optics, Photocell and Receptacle, Shield

FL04-YK-LG

FL04-SF

FL04-PM

FL04-MM

HB01R

MS04-MW-TW-DC

ORDER CODE: FL04B-150W-40K-UD
Product Code: FL04B-150WJT3C1-BRYM40

TECHNICAL DATA

LIGHT SPECIFICATIONS

Lumens	20,423 lm
Efficacy	135 lm/W
CCT	4000K
CRI	73
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLJ1CMVRE1AX

ISOCANDELA



ILLUMINANCE AT A DISTANCE



DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

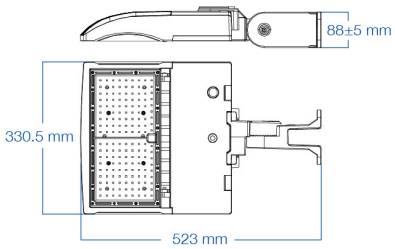

ELECTRICAL

Wattage	150W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-30 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	1.32 ft²
Net Weight	6.36 kg
Gross Weight	7.11 kg
Carton Qty	1
Carton Dimensions	690 x 380 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Yoke Mount	FL04-YK-LG
Motion Sensor	MS04-MW-TW-DC
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E
Shield	FL04B-SHIELD-SM
Type IV Optics	FL04B-TYPE-IV
Type V Optics	FL04B-TYPE-V