

# FL04B Flood / Area Light

240W | 4000K | 120-347V




**TRUE UNIVERSAL POWER INPUT FROM 120-347V!**

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

## Removable Access Plate

for easy field installation of twist lock photocell receptacle

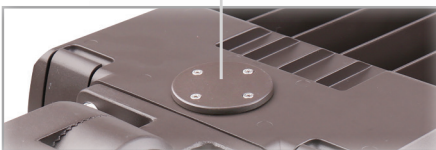

## Pre-wired for Optional Motion Sensor

(Sensor & remote sold separately)




HB01R MS040-MW-TW-DC

## Rugged Die Cast Aluminum Housing (Bronze)

## Type III Polycarbonate Optics

Type IV and V available

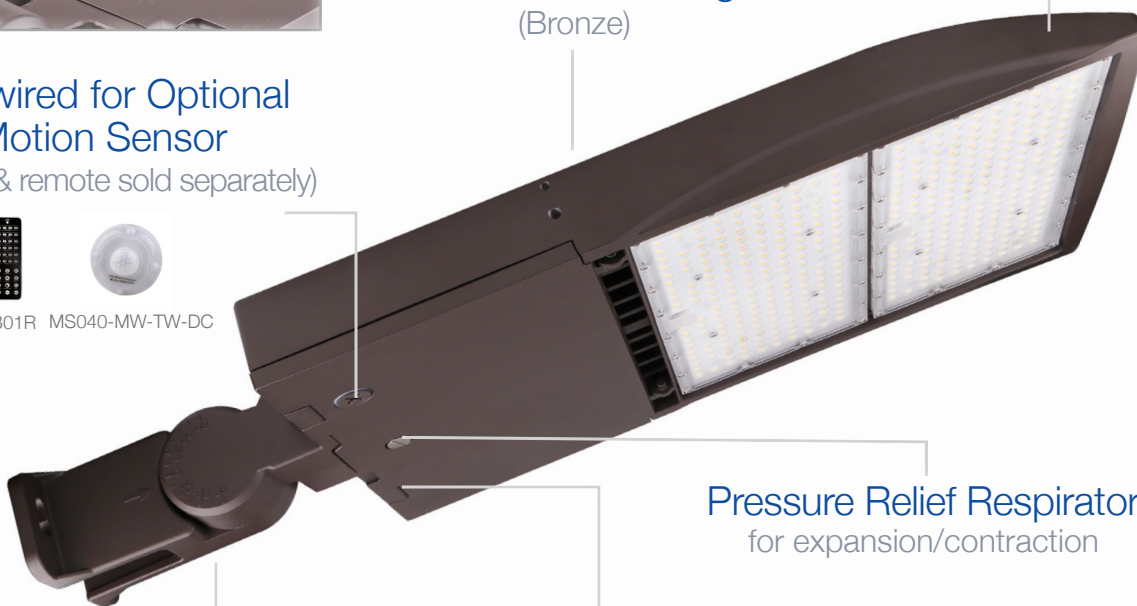

## Pressure Relief Respirator

for expansion/contraction

## Quick-Release, Hinged Access Cover

for control compartment

## Complete with Trunnion

Interchangeable mounting options sold separately

### Accessories (Ordered Separately):

Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Type IV and V Optics, Photocell and Receptacle, Shield



FL04-YK-HG



FL04-SF



FL04-PM



FL04-MM



HB01R



MS040-MW-TW-DC

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	34,784 lm
Efficacy	141 lm/W
CCT	4000K
CRI	73
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E482965
DLC	PL5EBZLIUBBN

### ISOCANDELA

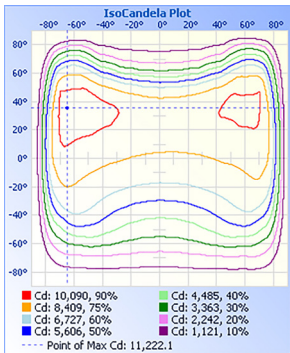


### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
17.0ft	28.0 fc	52.1 ft 190.0 ft
34.0ft	6.99 fc	104.1 ft 380.0 ft
51.0ft	3.11 fc	156.2 ft 570.1 ft
68.0ft	1.75 fc	208.2 ft 760.1 ft
85.0ft	1.12 fc	260.3 ft 950.1 ft
102.0ft	0.78 fc	312.4 ft 1,140.1 ft

■ Vert. Spread: 113.7°  
■ Horiz. Spread: 159.7°

### DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

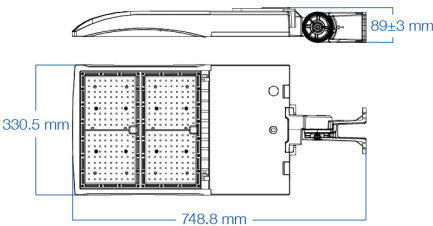

### ELECTRICAL

Wattage	240W
Voltage	120-347V
Power Factor	0.9
THD	20%
Operating Temp	-30 to 50°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	2.31 ft²
Net Weight	8.75 kg
Gross Weight	9.75 kg
Carton Qty	1
Carton Dimensions	915 x 380 x 155 mm

### ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Yoke Mount	FL04-YK-HG
Motion Sensor	MS04-MW-TW-DC
Motion Sensor Remote	HB01R

Photocell and Receptacle  
for 120-277V sites JL-200 and JL-205LV

Photocell and Receptacle  
for 277-480V sites JL-200 and JL-207E

Shield FL04B-SHIELD-LG

Type IV Optics FL04B-TYPE-IV

Type V Optics FL04B-TYPE-V

Note: If purchasing FL04B-TYPE-IV or FL04B-TYPE-V, you must order a quantity of 2 for this fixture (sold separately)