

FL04B Flood / Area Light

300W | 3000K | 120-347V



TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

Pre-wired for Optional Motion Sensor
(Sensor & remote sold separately)

Rugged Die Cast Aluminum Housing
(Bronze)

Pressure Relief Respirator
for expansion/contraction


Type III Polycarbonate Optics
Type IV and V available

Quick-Release, Hinged Access Cover
for control compartment

Complete with Trunnion
Interchangeable mounting options sold separately

Removable Access Plate
for easy field installation of twist lock photocell receptacle

Approved by International Dark Sky Association
when used with FL04-FM
(sold separately)

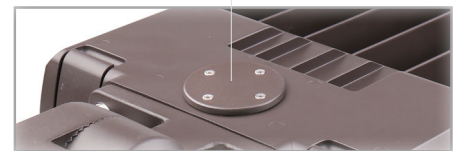

Accessories (Ordered Separately):
Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Type IV and V Optics, Photocell and Receptacle, Shield



FL04-YK-HG



FL04-SF



FL04-PM



FL04-MM



HB01R



HB01DMS-A

TECHNICAL DATA




LIGHT SPECIFICATIONS

| | |
|----------|------------|
| Lumens | 38,796 lm |
| Efficacy | 131 lm/W |
| CCT | 3000K |
| CRI | 70 |
| L70 Life | 50,000 hrs |
| Dimmable | 0-10V |
| Warranty | 10-year |


APPROVALS AND LISTINGS

| | |
|-------------|--------------|
| cUL | E482965 |
| DLC Premium | PL28RM2BSP73 |


DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

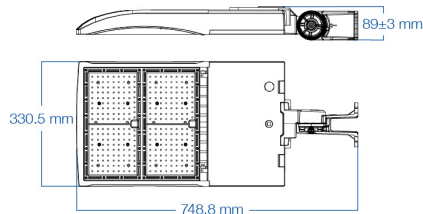

ILLUMINANCE AT A DISTANCE



ISOCANDELA

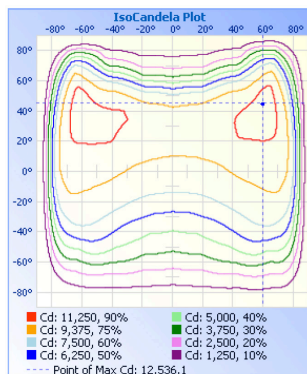

ELECTRICAL

| | |
|----------------|-------------|
| Wattage | 300W |
| Voltage | 120-347V |
| Power Factor | 0.9 |
| THD | 15% |
| Operating Temp | -35 to 50°C |

CONSTRUCTION

| | |
|-------------------|--------------------|
| Housing | Die-Cast Aluminum |
| Cover | Polycarbonate |
| Finish | Bronze |
| IP Rating | IP65 |
| EPA | 2.31 ft² |
| Net Weight | 9.32 kg |
| Gross Weight | 10.32 kg |
| Carton Qty | 1 |
| Carton Dimensions | 915 x 380 x 155 mm |

ACCESSORIES (SOLD SEPARATELY)

| | |
|---|---------------------|
| Slip Fit | FL04-SF |
| Pole Mount | FL04-PM |
| Multi Mount | FL04-MM |
| Fixed Mount | FL04-FM |
| Yoke Mount | FL04-YK-HG |
| Motion Sensor | HB01DMS-A |
| Motion Sensor Remote | HB01R |
| Photocell and Receptacle for 120-277V sites | JL-200 and JL-205LV |
| Photocell and Receptacle for 277-480V sites | JL-200 and JL-207E |
| Shield | FL04B-SHIELD-LG |
| Type IV Optics | FL04B-TYPE-IV |
| Type V Optics | FL04B-TYPE-V |

Note: If purchasing FL04B-TYPE-IV or FL04B-TYPE-V, you must order a quantity of 2 for this fixture (sold separately)