

# FL04B Flood / Area Light


450W | 4000K | 120-347V



**TRUE UNIVERSAL POWER INPUT FROM 120-347V!**

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

**Removable Access Plate**  
for easy field installation of  
twist lock photocell receptacle

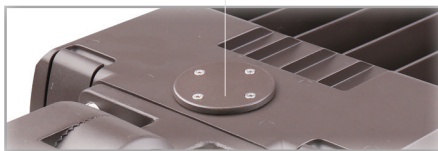

**Rugged Die Cast Aluminum Housing**  
(Bronze)



**Pressure Relief Respirator**  
for expansion/contraction

**Complete with Trunnion**  
Interchangeable mounting  
options sold separately

**Quick-Release, Hinged Access Cover**  
for control compartment

Accessories (Ordered Separately):  
Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote,  
Motion Sensor, Photocell and Receptacle



FL04-SF



FL04-PM



FL04-MM



HB01R



HB01DMS-B

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	62,228 lm
Efficacy	138 lm/W
CCT	4000K
CRI	> 70
L70 Life	> 54,000 hrs
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLREAQFBZKXH


### DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

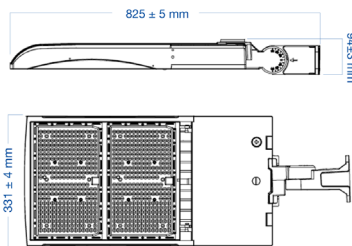

### ISOCANDELA

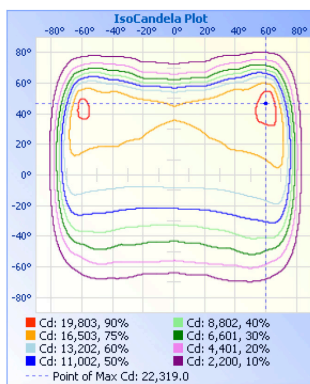

### ILLUMINANCE AT A DISTANCE

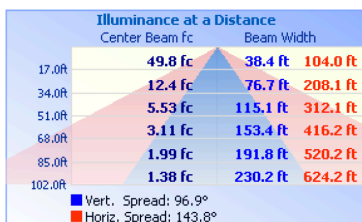

### ELECTRICAL

Wattage	450W
Voltage	120-347V
Power Factor	> 0.9
THD	< 15%
Operating Temp	-40 to 50°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	2.31 ft²
Net Weight	9.32 kg
Gross Weight	10.32 kg
Carton Qty	1
Carton Dimensions	915 x 380 x 155 mm

### ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Motion Sensor	HB01DMS-B
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E