

FL04B Flood / Area Light


80W | 4000K | 120-347V



TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

Removable Access Plate
for easy field installation of
twist lock photocell receptacle

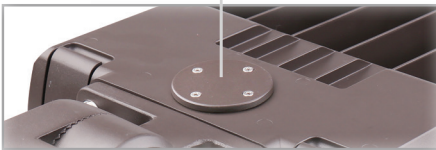

Type III Polycarbonate Optics
Type IV and V available

Rugged Die Cast Aluminum Housing
(Bronze)


Pre-wired for Optional Motion Sensor
(Sensor & remote sold separately)



HB01R



HB01DMS-A

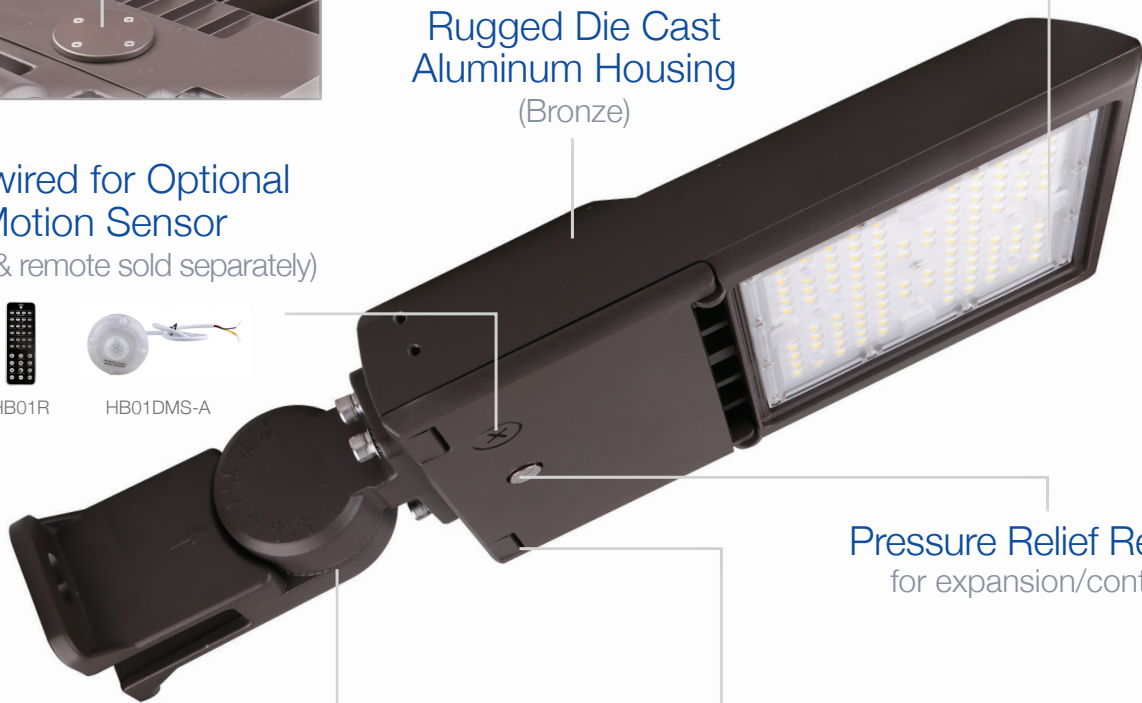

Pressure Relief Respirator
for expansion/contraction

Complete with Trunnion
Interchangeable mounting
options sold separately

Quick-Release, Hinged Access Cover
for control compartment

Accessories (Ordered Separately):

Slip Fit, Pole Mount, Multi Mount, Type 4 Optics, Type 5 Optics,
Motion Sensor Remote, Motion Sensor, Photocell and Receptacle



FL04-SF



FL04-PM



FL04-MM



FL04B-TYPE-IV-TN



FL04B-TYPE-V-TN

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	10, 606 lm
Efficacy	138 lm/W
CCT	4000K
CRI	73
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLPAT5X2W04M

ISOCANDELA

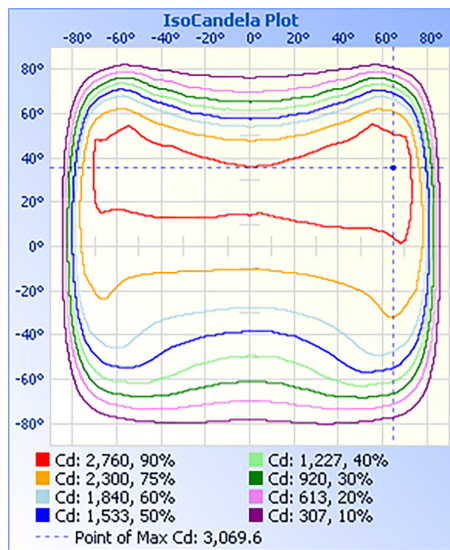

ILLUMINANCE AT A DISTANCE

Distance (ft)	Center Beam fc	Beam Width	Beam Area (sq ft)
17.0ft	8.71 fc	63.9 ft	182.2 ft
34.0ft	2.18 fc	127.7 ft	364.4 ft
51.0ft	0.97 fc	191.6 ft	546.6 ft
68.0ft	0.54 fc	255.5 ft	728.9 ft
85.0ft	0.35 fc	319.4 ft	911.1 ft
102.0ft	0.24 fc	383.2 ft	1,093.3 ft

■ Vert. Spread: 123.9°
■ Horiz. Spread: 158.9°

ELECTRICAL

Wattage	80W
Voltage	120-347V
Power Factor	0.9
THD	20%
Operating Temp	-30 to 50°C


CONSTRUCTION

Housing	Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	2.37 ft²
Net Weight	4.43 kg
Gross Weight	5.43 kg
Carton Qty	1
Carton Dimensions	710 x 295 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Motion Sensor	HB01DMS-A
Motion Sensor Remote	HB01R
Photocell and Receptacle	JL-200 and JL-205LV for 120-277V site
Photocell and Receptacle	JL-200 and JL-207E for 277-480V site
Type 4 Optics	FL04B-TYPE-IV-TN
Type 5 Optics	FL04B-TYPE-V-TN

DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

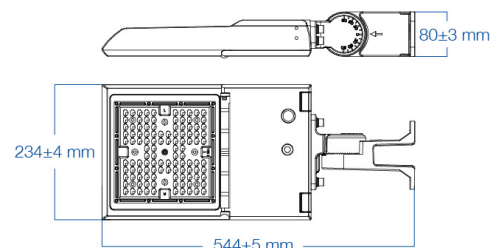

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com