


# Mini Flood Light

Power Selectable | Colour Selectable | 120-277V

Ideal for landscaping, patio, and security lighting, signs, and building facades  
Excellent replacement for quartz halogen fixtures

Die-Cast  
Aluminum Housing  
with cooling fins for  
superior heat dissipation



Power Selectable  
(21W / 24W / 27W / 30W)

Built-in Photocell

56 LED Chips  
for even illumination

0.5m Power Cord

High-Impact  
Polycarbonate  
Lens/Optics



Colour Selectable  
3000K / 4000K / 5000K

Complete With  
Yoke Mount  
Knuckle mount  
sold separately



Rugged Polyester  
Powder Coat Finish  
(Bronze)

Optional Accessories:  
Knuckle Mount (FLM-KNS)

Suggested Substitutions:  
FLM-15W-40K-LV-YK  
FLM-50W-3CCT-LV

## TECHNICAL DATA



### LIGHT SPECIFICATIONS


Lumens	4,141 lm
Efficacy	129.6 lm/W @ 4000K
CCT	3000K / 4000K / 5000K
CRI	70
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year

### APPROVALS AND LISTINGS


cUL	E482965
DLC	PL3F7KBXG1NW

### DIMENSIONS

Yoke Mount (Standard)



Knuckle Mount (Sold Separately)



### ILLUMINANCE AT A DISTANCE

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
17.0ft	5.22 fc	31.3 ft	50.6 ft
34.0ft	1.31 fc	62.6 ft	101.2 ft
51.0ft	0.58 fc	93.9 ft	151.8 ft
68.0ft	0.33 fc	125.2 ft	202.4 ft
85.0ft	0.21 fc	156.5 ft	253.0 ft
102.0ft	0.15 fc	187.8 ft	303.6 ft

■ Vert. Spread: 85.3°  
■ Horiz. Spread: 112.2°

### ELECTRICAL

Wattage	Selectable (21W/24W/27W/30W)
Voltage	120-277V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C


### CONSTRUCTION

Housing	Aluminum Alloy
Finish	Bronze
IP Rating	IP65
Fixture Weight	1.1 kg
Carton Weight	11.2 kg
Carton Qty	8
Carton Dimensions	484 x 302 x 297 mm

### ACCESSORIES (SOLD SEPARATELY)

Knuckle Mount	FLM-KNS
Red Lens	FLM-30W-RED
Blue Lens	FLM-30W-BLU
Green Lens	FLM-30W-GRN

### ISOCANDELA

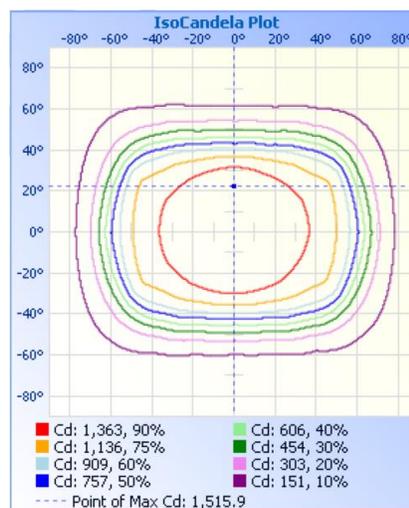

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)