


# Mini Flood Light

Power Selectable | Colour Selectable | 120-347V

Ideal for landscaping, patio, and security lighting, signs, and building facades  
Excellent replacement for quartz halogen fixtures

Die-Cast Aluminum Housing  
with cooling fins for superior heat dissipation



Power Selectable  
(63W / 72W / 81W / 90W)

Built-in Photocell

56 LED Chips  
for even illumination

0.5m Power Cord

High-Impact Polycarbonate Lens/Optics



Colour Selectable  
3000K / 4000K / 5000K

Complete With Yoke Mount  
Knuckle mount sold separately

Rugged Polyester Powder Coat Finish  
(Bronze)



Optional Accessories:  
Knuckle Mount (FLM-KNL)  
Slip Fit (FLM-SF)

Suggested Substitutions:  
FLM-70W-3CCT-UD

## TECHNICAL DATA



### LIGHT SPECIFICATIONS


Lumens	11,320 lm
Efficacy	125 lm/W @ 3000K
CCT	3000K / 4000K / 5000K
CRI	80
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year

### APPROVALS AND LISTINGS


cUL	E482965
DLC	PLQEE9L9QMHN

### DIMENSIONS


Yoke Mount (Standard)

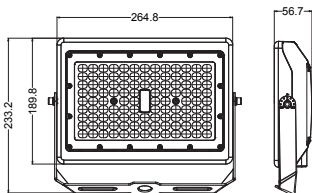

Knuckle Mount (Sold Separately)

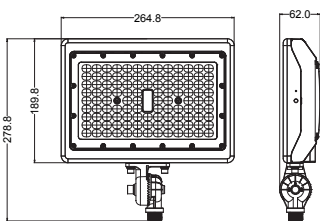

Slip Fit (Sold Separately)

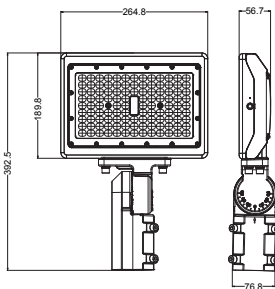

### ELECTRICAL

Wattage	Selectable (63W/72W/81W/90W)
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C


### CONSTRUCTION

Housing	Die-Cast Aluminum
Finish	Bronze
IP Rating	IP65
Carton Weight	15.5 kg
Carton Qty	5
Carton Dimensions	394 x 338 x 362 mm

### ACCESSORIES (SOLD SEPARATELY)

Knuckle Mount	FLM-KNL
Slip Fit	FLM-SF

### ISOCANDELA

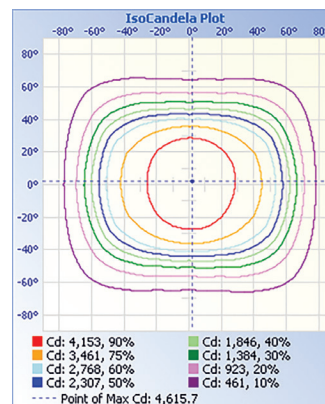

### ILLUMINANCE AT A DISTANCE

Center Beam Fc	Beam Width	
	Vertical Spread	Horizontal Spread
17.0ft	15.9 fc	51.9 ft
34.0ft	3.99 fc	103.8 ft
51.0ft	1.77 fc	155.6 ft
68.0ft	1.00 fc	207.5 ft
85.0ft	0.64 fc	259.4 ft
102.0ft	0.44 fc	311.3 ft

■ Vert. Spread: 87.2°  
■ Horiz. Spread: 113.5°

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)