

High Bay

240W | 5000K | 120-277V



HB7B

HB7B series High Bay
Ideal for warehouses, factories, and workshops



Accessories (Ordered Separately):
Wire Guard, Motion Sensor, Motion Sensor Remote,
Yoke Mount, Aluminum or Polycarbonate Reflector,
Polycarbonate Bottom Cover, Frosted Lens



HB7B-AL-REF-LG



HB7B-PC-REF-LG



HB7B-YK-LG



HB7B-SENSOR



HB7B-REMOTE

TECHNICAL DATA



LIGHT SPECIFICATIONS

| | |
|------------|-----------|
| Lumens | 35,294 lm |
| Efficacy | 147 lm/W |
| CCT | 5000K |
| CRI | 80 |
| Beam Angle | 120° |
| Dimmable | 0-10V |
| Warranty | 5-year |


APPROVALS AND LISTINGS

| | |
|-------------|--------------|
| cUL | E482965 |
| DLC Premium | PLGH2NZ6XOU1 |

ILLUMINANCE AT A DISTANCE



ISOCANDELA PLOT

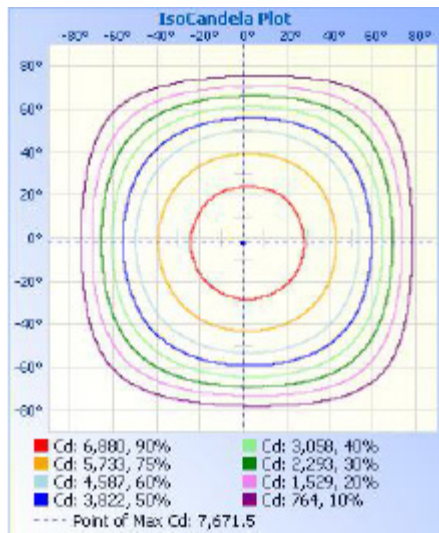

ELECTRICAL

| | |
|----------------|-------------|
| Wattage | 240W |
| Voltage | 120-277V |
| Power Factor | 0.9 |
| THD | 15% |
| Operating Temp | -40 to 55°C |

CONSTRUCTION

| | |
|-------------------|--------------------|
| Housing | Aluminum alloy |
| Cover | Clear glass |
| Finish | Black |
| IP Rating | IP65 |
| Net Weight | 5 kg |
| Carton Qty | 1 |
| Carton Weight | 6.1 kg |
| Carton Dimensions | 442 x 442 x 206 mm |

ACCESSORIES (Ordered Separately)

| | |
|-------------------------|--------------------|
| Motion Sensor | HB7B-SENSOR |
| Motion Sensor Remote | HB7B-REMOTE |
| Yoke Mount | HB7B-YK-LG |
| Wire Guard | HB7B-WG-LG |
| Aluminum Reflector | HB7B-AL-REF-LG |
| Polycarbonate Reflector | HB7B-PC-REF-LG |
| PC Prism Cover | HB7B-PC-REF-LG-BCV |
| Frosted Lens | HB7B-FR-LENS-LG |

Note: HB7B-SENSOR will dim the fixture to 10%, but will **not** turn the fixture fully off.

DIMENSIONS

