

High Bay

200W | 4000K | 120-277V



HB7C

Ideal for warehouses, factories, gas stations, gymnasiums, grocery stores, and more

Long Life, Elevated Driver
for cooler operation

Instant Start and
0-10V Dimmable

2m Power Cord



Newly Designed,
Shatterproof
Polycarbonate Optics
meet/exceed DLC 5.1
glare standards

Easy Twist-on
Motion Sensor
Sold separately

Polyester Powder
Coat Finish
(Black)

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	29,500 lm
Efficacy	148 lm/W
CCT	4000K
CRI	83
Beam Angle	90°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLT8NPSZ37C1

ISOCANDELA PLOT

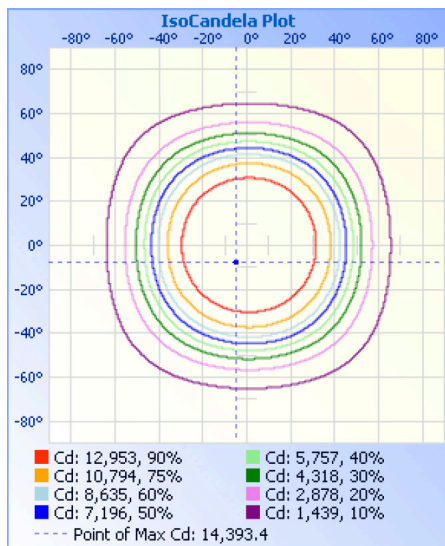

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	49.7 fc	33.0 ft	32.7 ft
34.0ft	12.4 fc	66.1 ft	65.3 ft
51.0ft	5.52 fc	99.1 ft	98.0 ft
68.0ft	3.11 fc	132.1 ft	130.6 ft
85.0ft	1.99 fc	165.1 ft	163.3 ft
102.0ft	1.38 fc	198.2 ft	195.9 ft

■ Vert. Spread: 88.3°
■ Horiz. Spread: 87.7°

ELECTRICAL

Wattage	200W
Voltage	120-277V
Surge Protection	4kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C

CONSTRUCTION


Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder coated
Finish Colour	Black
IP Rating	IP65
Net Weight	4 kg
Gross Weight	5.1 kg
Carton Qty	1
Carton Dimensions	442 x 442 x 206 mm

ACCESSORIES (Ordered Separately)

Motion Sensor	HB7B-SENSOR
Motion Sensor Remote	HB7B-REMOTE
Yoke Mount	HB7B-YK-LG
Wire Guard	HB7B-WG-LG
Aluminum Reflector	HB7B-AL-REF-LG
Polycarbonate Reflector	HB7B-PC-REF-LG
PC Bottom Cover	HB7B-PC-REF-LG-BCV
Frosted Lens	HB7B-FR-LENS-LG

Note: HB7B-SENSOR will dim the fixture to 10%, but will **not** turn the fixture fully off.

DIMENSIONAL DRAWINGS

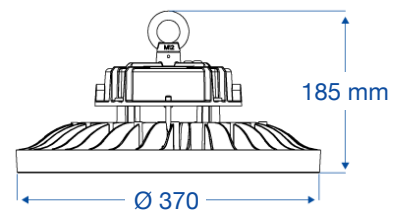

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833