

# 300W Linear High Bay

Slim, compact design. 120-347V

Suitable for manufacturing, shops and warehouse applications



Steel housing with white epoxy powder-coat finish

Low glare frosted lens included  
(can be removed)



120-347V driver  
0-10V dimmable

Chain mounts and v-hooks included

Optional motion sensor, wire guard, and/or brackets ordered separately

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

|            |             |
|------------|-------------|
| Lumens     | 41,756 lm   |
| Efficacy   | 139.34 lm/W |
| CCT        | 4000K       |
| CRI        | 82.5        |
| Beam angle | 100°        |
| L70 Life   | 50,000      |
| Dimmable   | 0-10V       |
| Warranty   | 5-year      |

### APPROVALS AND LISTINGS

|             |              |
|-------------|--------------|
| cUL         | E482965      |
| DLC Premium | PLX9BEWIOWAN |

### LUMINOUS INTENSITY DISTRIBUTION CURVE

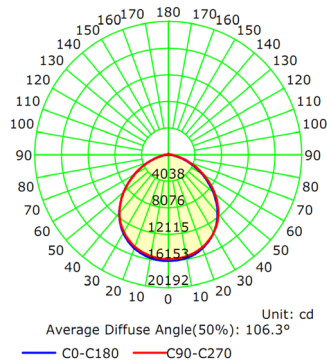


### ELECTRICAL

|                |             |
|----------------|-------------|
| Wattage        | 300W        |
| Voltage        | 120-347V    |
| Power factor   | 0.90        |
| THD            | 15%         |
| Operating temp | -40 to 50°C |


### CONSTRUCTION

|            |                      |
|------------|----------------------|
| Housing    | Steel                |
| Finish     | White                |
| IP Rating  | IP40 (damp location) |
| Weight     | 14.1 lbs             |
| Carton qty | 1                    |

### DIMENSIONS

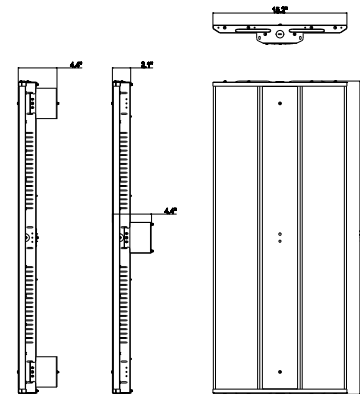

### AVERAGE ILLUMINANCE EFFECTIVE FIGURE

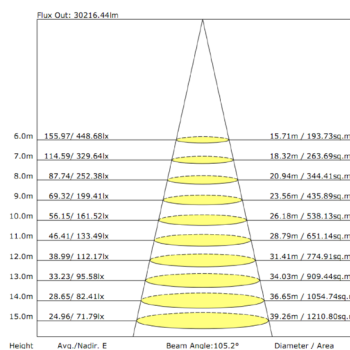

### ACCESSORIES

|                                   |                |
|-----------------------------------|----------------|
| Bracket                           | LHB-BRACKET-LG |
| Motion Sensor                     | YM2502         |
| Motion Sensor (Dimmable 120-277V) | MC054V-RC-D    |
| Wire Guard                        | LHB-300-WG     |



LHB-BRACKET-LG

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com