

LHB03 Linear High Bay

300W | 5000K | 120-347V



Ideal for warehouses, factories, workshops, and more
Energy efficient replacement for traditional fluorescent fixtures and HID high bays



120-347V Driver
with 4kV surge protection

0-10V Dimmable

Instant Start
with no flickering
or humming

Newly Designed,
Shatterproof
Polycarbonate Optics
meet/exceed DLC 5.1
glare standards

Centre Knockout Allows
for Easy Installation of an
Optional Motion Sensor
(sold separately)

Complete with
10' Cord Whip



Mounting Hooks Included
2 x mounting hooks and 2 x 40" chains

Accessories (Sold Separately): Motion Sensor (MS04-MW-TW-DC),
Motion Sensor Remote (HB01R), Wireguard (LHB-300-WG), Bracket
(LHB-BRACKET-LG)



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	41,148 lm
Efficacy	136 lm/W
CCT	5000K
CRI	82
Dimmable	0-10V
Beam Angle	90°
L70 Life	>51,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLDTQ5TT2RKO

ILLUMINANCE AT A DISTANCE

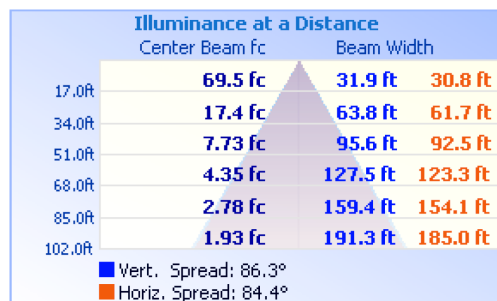

ISOCANDELA

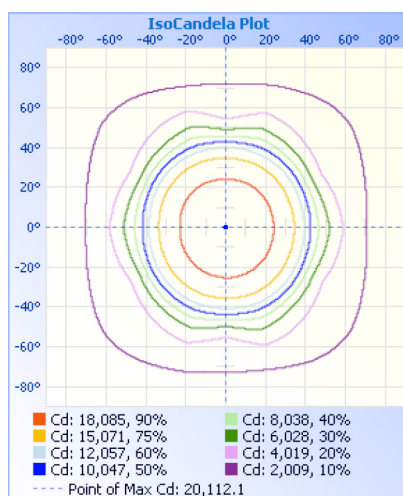

ELECTRICAL

Wattage	300W
Voltage	120-347V
Surge Protection	4kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-25 to 50°C

CONSTRUCTION


Housing	Steel
Finish	Powder Coat
Finish Colour	White
IP Rating	IP20
Net Weight	6.3 kg
Gross Weight	8.3 kg
Product Dimensions	900 x 385 x 53 mm
Carton Qty	1
Carton Dimensions	1000 x 460 x 125 mm

ACCESSORIES (SOLD SEPARATELY)

MS04-MW-TW-DC	Motion Sensor
HB01R	Remote for Motion Sensor
LHB-300-WG	Wireguard
LHB-BRACKET-LG	Pendant Mounting Bracket

NOTE: Remote (HB01R) is **required** for motion sensor (HB01DMS-A) to function.

DIMENSIONS

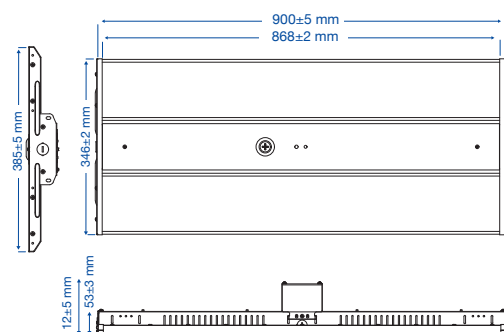

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833