

LHB2 Linear High Bay

165W | 4000K | 120-347V



Ideal for warehouses, factories, workshops and more
Energy efficient replacement for traditional fluorescent fixtures and HID high bays

Long Lifespan

saves you time and money

Instant Start

with no flickering
or humming

Easy to Install
and Operate



Soft and Uniform Light

makes it easier on the eye

Centre Knockout Allows
for Easy Installation of an
Optional Motion Sensor

(sold separately)



Mounting Hooks Included

2 x mounting hooks and 2 x 40" chains

Accessories (Ordered Separately):


Motion Sensor (HB01DMS-B), Motion Sensor Remote (HB01R),
Wireguard (LHB-110-165-WG), Bracket (LHB-BRACKET-SM)



HB01DMS-B



HB01R



LHB-110-165-WG



LHB-BRACKET-SM

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	23,110 lm
Efficacy	142 lm/W
CCT	4000K
CRI	80
L70 Life	170,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLBLSE89QDA2

ILLUMINANCE AT A DISTANCE

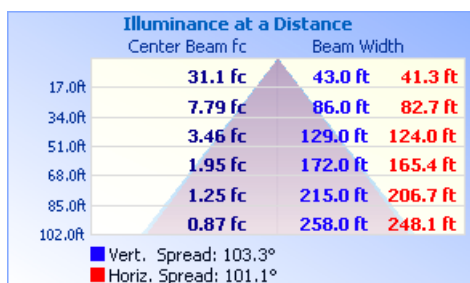

ELECTRICAL

Wattage	165W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 80°C

CONSTRUCTION


Housing	Steel SGCC
Finish	White
IP Rating	IP20
Product Dimensions	630 x 300 x 48 mm
Ctn Qty	2
Carton Dimensions	720 x 360 x 185 mm

ACCESSORIES (Ordered Separately)


HB01DMS-B	Motion Sensor
HB01R	Remote for Motion Sensor
LHB-110-165-WG	Wireguard
LHB-BRACKET-SM	Bracket

NOTE: Remote (HB01R) is **required** for motion sensor (HB01DMS-B) to function.

ISOCANDELA

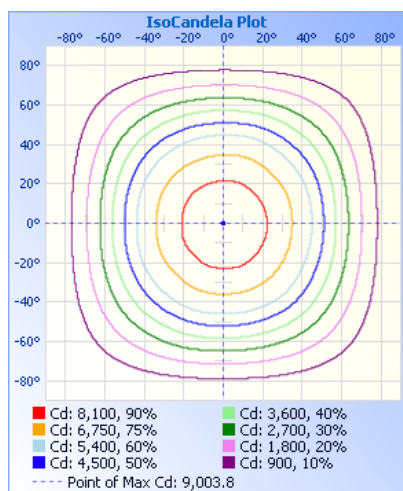

DIMENSIONS

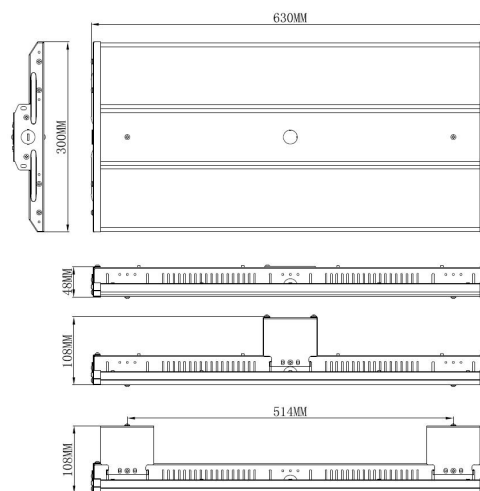

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com