CSCLED

ORDER CODE: LHB2-220W-40K-UD

LHB2 Linear High Bay

220W | 4000K | 120-347V

Ideal for warehouses, factories, workshops and more
Energy efficient replacement for traditional fluorescent fixtures and HID high bays

Long Lifespan
saves you time and money

Instart Start
with no flickering or humming

Easy to Install and Operate

Soft and Uniform Light
makes it easier on the eye

Centre Knockout Allows for Easy Installation of an Optional Motion Sensor
(sold separately)

Mounting Hooks Included
2 x mounting hooks and 2 x 40" chains

Accessories (Ordered Separately):
Motion Sensor (HB01DMS-B), Motion Sensor Remote (HB01R), Wireguard (LHB-220-WG), Bracket (LHB-BRACKET-SM)

HB01DMS-B

HB01R


LHB-220-WG

LHB-BRACKET-SM

TECHNICAL DATA

LIGHT SPECIFICATIONS

Lumens	29,424 lm
Efficacy	138 lm/W
CCT	4000K
CRI	80
L70 Life	170,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965

ILLUMINANCE AT A DISTANCE

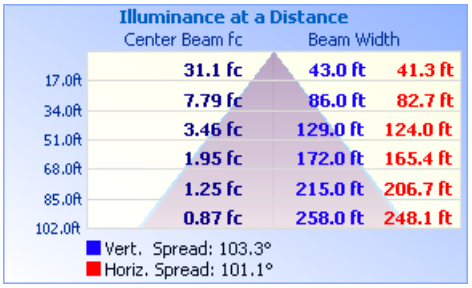

ISOCANDELA

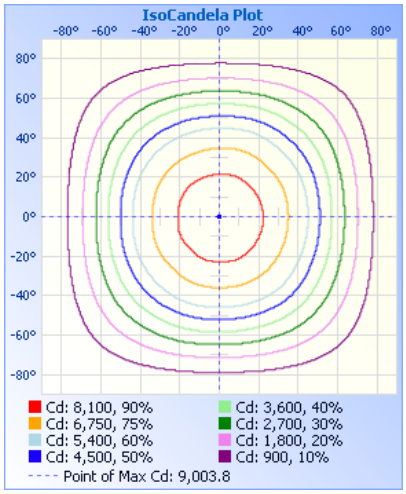

ELECTRICAL

Wattage	220W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 80°C

CONSTRUCTION

Housing	Steel SGCC
Finish	White
IP Rating	IP20
Product Dimensions	630 x 360 x 48 mm
Ctn Qty	2
Carton Dimensions	720 x 420 x 185 mm

ACCESSORIES (Ordered Separately)

HB01DMS-B	Motion Sensor
HB01R	Remote for Motion Sensor
LHB-220-WG	Wireguard
LHB-BRACKET-SM	Bracket

NOTE: Remote (HB01R) is **required** for motion sensor (HB01DMS-B) to function.
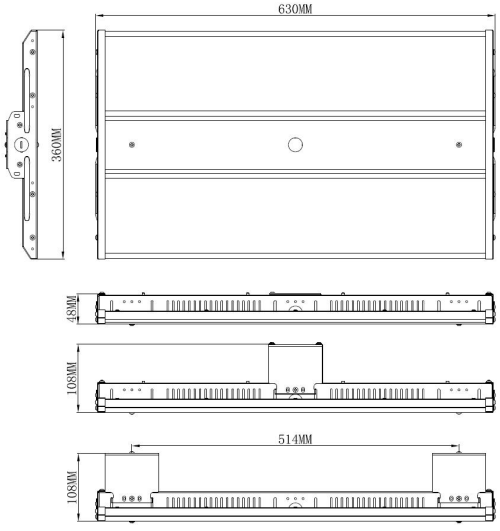
DIMENSIONS