

# 20W Mini Wall Pack



Powerful performance in an attractive package  
Ideal for security lighting, commercial entrances and more

Built in photocell can be bypassed  
with quick connect plug

1/2" NPT plugs  
for conduit or controls

Quality aluminum  
construction with bronze  
powder coat finish



Can be quickly installed with,  
or without octogan box

Low glare, frosted  
polycarbonate lens

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	2,584 lm
Efficacy	127.22 lm/W
CCT	4000K
CRI	83
L70 Life	50,000
Dimmable	No
Warranty	5-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC	PLR1DX9YTF32

### ILLUMINANCE AT A DISTANCE

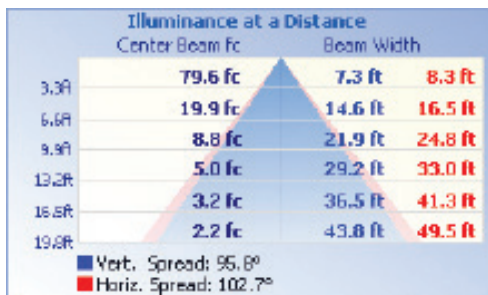

### ISOCANDELA PLOT

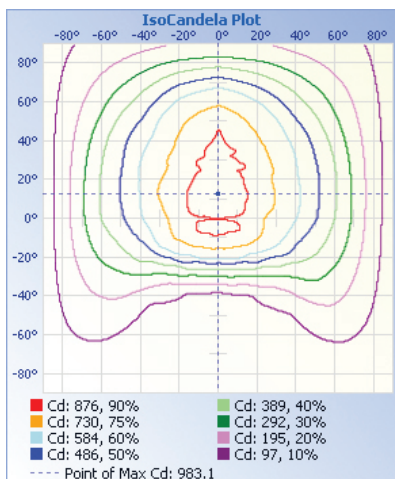

### ELECTRICAL

Wattage	20W
Voltage	100-277V
Power factor	0.92
THD	15.35%
Operating temp	-40 to 45°C

### CONSTRUCTION

Housing	Aluminum
Finish colour	Bronze
IP rating	IP65
Weight	1.98 lbs
Carton qty	10

### DIMENSIONS

