


# PLBL Backlit Panel Light

40W | 3500K | 120-347V | 2'x2'



Ideal for offices, gymnasiums, schools, hospitals, and more.

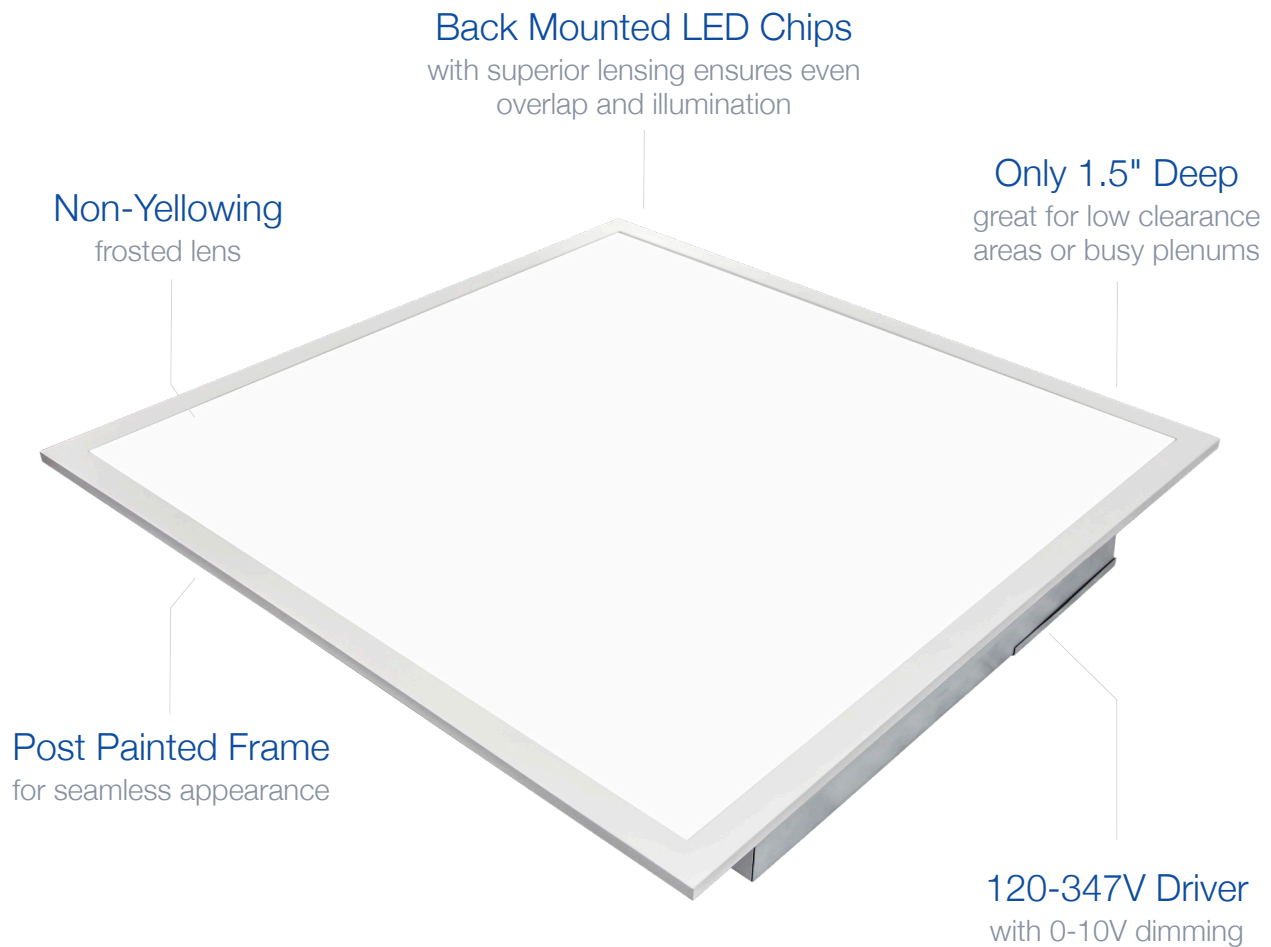

Optional Accessories (Sold Separately)  
Surface Mount Kit (PLBL22-SK), Cable Kit (PLBL22-CABLE-KIT)



PLBL22-SK



PLBL22-CABLE-KIT

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	4,697 lm
Efficacy	114.06 lm/W
CCT	3500K
CRI	82.8
Dimmable	0-10V
Life	50,000 hours
Warranty	7-year

### APPROVALS AND LISTINGS

ETL	5000444
DLC	PLR6L6RBNIDG


### ELECTRICAL

Wattage	40W
Voltage	120-347V
Power Factor	0.92
THD	21.4 %
Operating temp	0° to 40°C

### CONSTRUCTION


Housing	Aluminum
Finish	White
IP Rating	IP40 (Damp Location Rated)
Carton qty	4

### ILLUMINANCE AT A DISTANCE

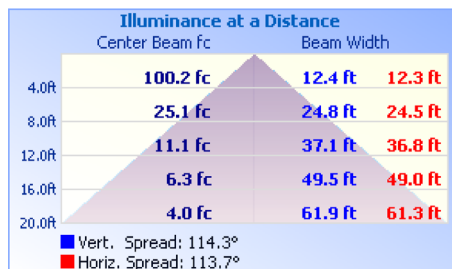


### ACCESSORIES (SOLD SEPARATELY)


Surface Mount Kit	PL22-SK
Cable Kit	PL22-CABLE-KIT

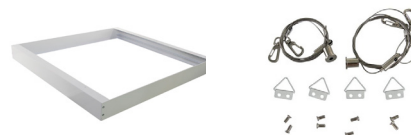

### DIMENSIONAL DRAWING

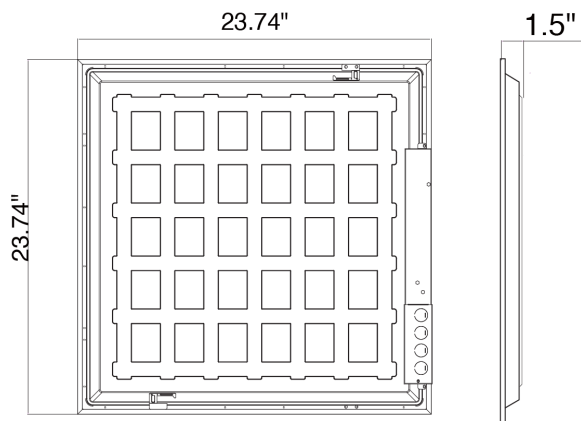

### ISOCANDELA PLOT

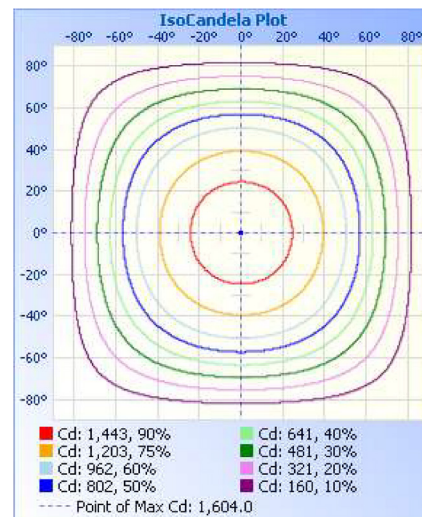

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)