

1'x 4' Premium Panel

20W, 30W, 40W Selectable | Colour Selectable | 120-347V

High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting. Ideal for use in schools, health care applications, offices, retail spaces, and more

0-10V Dimming Lead on Both Sides of Driver Junction Box

Use Switches to Select Colour Temperature and Wattage



Non-yellowing Prismatic Lens



120-347V, 0-10V Dimmable Driver

Seismic Clips Included




Colour Selectable (3000K / 3500K / 4000K)

Power Selectable (20W / 30W / 40W)

Less than 1.8" Deep
ideal for tight plenum areas

Waffle Stamping
increases heat dissipation and driver life

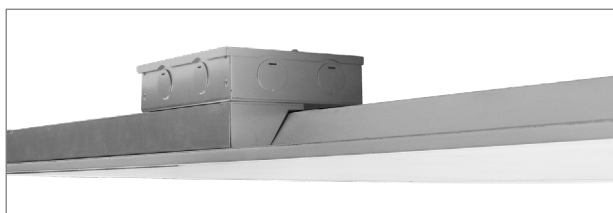

Junction Box (PLS-JB)
sold separately

Accessories (Sold Separately)



Suspension Kit
PLS-SUSKIT



Surface Mount Kit
PLS14-SK



Junction Box
PLS-JB



Recessed Frame Kit
PLS14-RFK

TECHNICAL DATA




LIGHT SPECIFICATIONS

| | |
|------------|--------------------------|
| Lumens | 5,000 lms @ 3000K |
| Efficacy | 125 lm/W |
| CCT | Selectable (30K/35K/40K) |
| CRI | 80 |
| Dimmable | 0-10V |
| Beam Angle | 120° |
| L70 Life | 50,000 hrs |
| Warranty | 7-year |

APPROVALS AND LISTINGS

| | |
|-------------|----------|
| ETL | 5000444 |
| DLC Premium | S-FUY7QN |

ISOCANDELA PLOT

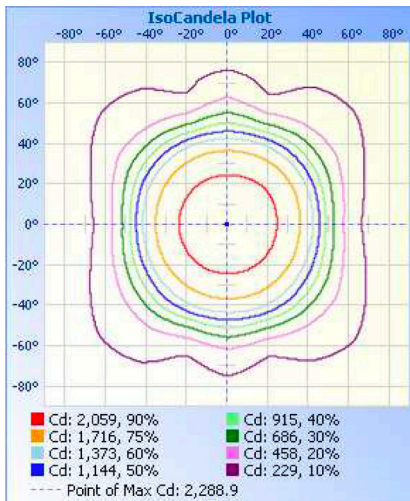

ILLUMINANCE AT A DISTANCE

| | Center Beam fc | Beam Width | |
|--------|----------------|------------|----------|
| 17.0R | 7.92 fc | 36.2 ft | 34.2 ft |
| 34.0R | 1.98 fc | 72.5 ft | 68.4 ft |
| 51.0R | 0.88 fc | 108.7 ft | 102.6 ft |
| 68.0R | 0.49 fc | 145.0 ft | 136.8 ft |
| 85.0R | 0.32 fc | 181.2 ft | 171.0 ft |
| 102.0R | 0.22 fc | 217.5 ft | 205.2 ft |

■ Vert. Spread: 93.7°
■ Horiz. Spread: 90.3°

ELECTRICAL

| | |
|----------------|--------------------------|
| Wattage | Selectable (20W/30W/40W) |
| Voltage | 120-347V |
| Power Factor | 0.90 |
| THD | 8% |
| Operating Temp | -20 to 40°C |

CONSTRUCTION

| | |
|--------------------|-------------------------|
| Housing | Metal |
| Lens Type | Prismatic |
| Finish | White |
| IP Rating | IP20 |
| Product Dimensions | 47.72 x 11.85 x 1.67 in |
| Carton Qty | 4 |

ACCESSORIES (SOLD SEPARATELY)

| | |
|------------|--------------------|
| PLS14-SK | Surface Mount Kit |
| PLS14-RFK | Recessed Frame Kit |
| PLS-SUSKIT | Suspension Kit |
| PLS-JB | Junction Box |

DIMENSIONAL DRAWINGS (IN)

