

1'x 4' Panel

20W, 30W, 40W Selectable | 4000K | 120-277V

High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting.
Ideal for use in schools, health care applications, offices, retail spaces, and more

Less than 1.8" Deep
ideal for tight plenum areas

0-10V Dimming Lead on Both
Sides of Driver Junction Box



Non-yellowing
Frosted Lens

120-277V, 0-10V
Dimmable Driver




Power Selectable
(20W / 30W / 40W)

Seismic Clips
Included



Waffle Stamping
increases heat dissipation and driver life

Use Switch to Select Wattage

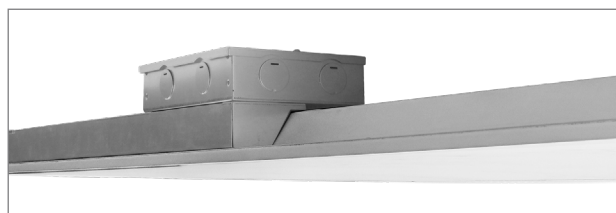

Junction Box (PLS-JB)
sold separately

Accessories (Sold Separately)



Suspension Kit
PLS-SUSKIT



Surface Mount Kit
PLS14-SK



Junction Box
PLS-JB



Recessed Frame Kit
PLS14-RFK

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,512 lms
Efficacy	112 lm/W
CCT	4000K
CRI	84
Dimmable	0-10V
Beam Angle	120°
L70 Life	50,000 hrs
Warranty	7-year


APPROVALS AND LISTINGS

ETL	5000444
DLC	S-U0TKD3

ISOCANDELA PLOT

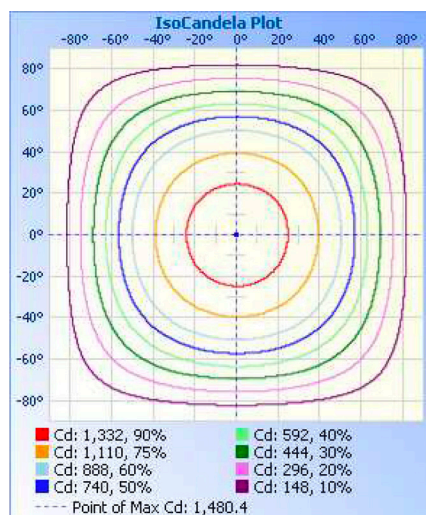

ILLUMINANCE AT A DISTANCE

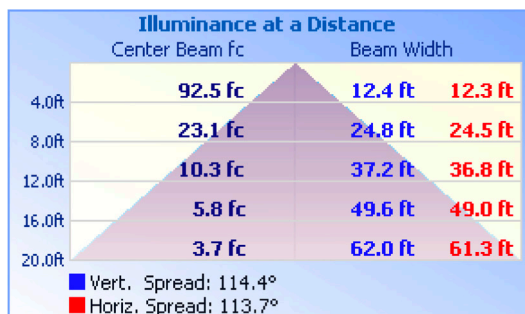

ELECTRICAL

Wattage	Selectable (20W/30W/40W)
Voltage	120-277V
Power Factor	0.98
THD	19.8%
Operating Temp	-20 to 40°C

CONSTRUCTION

Housing	Metal
Lens Type	Frosted
Finish	White
IP Rating	IP20
Product Dimensions	47.72 x 11.85 x 1.67 in
Carton Qty	4

ACCESSORIES (SOLD SEPARATELY)

PLS14-SK	Surface Mount Kit
PLS14-RFK	Recessed Frame Kit
PLS-SUSKIT	Suspension Kit
PLS-JB	Junction Box

DIMENSIONAL DRAWINGS (IN)

