

2'x2' Panel

20W, 30W, 40W Selectable | 3CCT | 120-347V


High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting.
Ideal for use in schools, health care applications, offices, retail spaces, and more



Accessories (Sold Separately)



Suspension Kit
PLS-SUSKIT



Surface Mount Kit
PLS22-SK



Junction Box
PLS-JB



Recessed Frame Kit
PLS22-RFK

TECHNICAL DATA



LIGHT SPECIFICATIONS


Lumens	4,375 lm
Efficacy	110 lm/W
CCT	3500K/4000K/5000K
CRI	>80
Dimmable	0-10V
Beam Angle	120°
L70 Life	50,000 hrs
Warranty	7-year

	3500K	4000K	5000K
20W	2664 lm	2757 lm	2656 lm
30W	3724 lm	3930 lm	3727 lm
40W	4375 lm	4678 lm	4345 lm

APPROVALS AND LISTINGS

ETL	5000444
-----	---------

DIMENSIONAL DRAWINGS (IN)

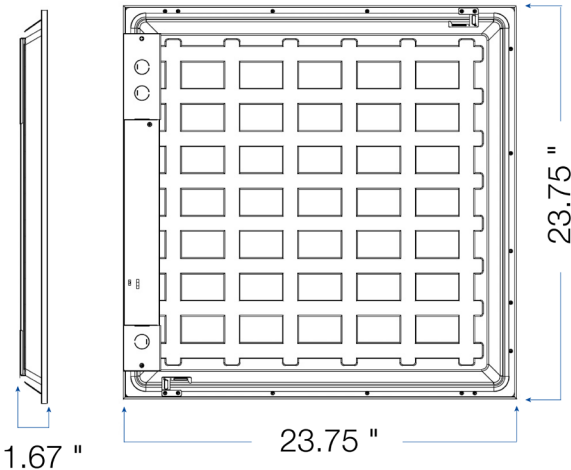

ELECTRICAL

Wattage	Selectable (20W/30W/40W)
Voltage	120-347V
Current	0.44A
Power Factor	0.94
THD	<20 %
Operating Temp	-20 to 40°C

CONSTRUCTION

Housing	Metal
Finish	Polyester Powder Coat
Finish Colour	White
IP Rating	IP20

DIMENSIONS & WEIGHTS

Fixture Weight	4.2 lbs
Fixture Dimensions	23.75" x 1.67" x 23.65"
Carton Qty	4 pcs
Carton Weight	19 lbs
Carton Dimensions	24.7" x 7" x 25"

ACCESSORIES (SOLD SEPARATELY)

PLS22-SK	Surface Mount Kit
PLS22-RFK	Recessed Frame Kit
PLS-SUSKIT	Suspension Kit
PLS-JB	Junction Box