



Order Code

PTA02-100W-40K

Pole Top Area Light

100W | 4000K | 120-277V



Elegant look and design ideal for parking lots, pathways, parks, retail settings, and more

Twist lock photocell receptacle
and photocell included
Shorting cap ordered separately*

Polyester powder-coat finish
(Bronze)

Instant start

High efficiency optics
with Type V distribution

Fits up to 3" OD pole



Shorting Cap (JL-208) sold separately



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	12,523 lm
Efficacy	124.36 lm/W
CCT	4000K
CRI	80
Distribution	Type V
L70 Life	92,000 hours
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLTWQXTLWSW5

ISOCANDELA PLOT

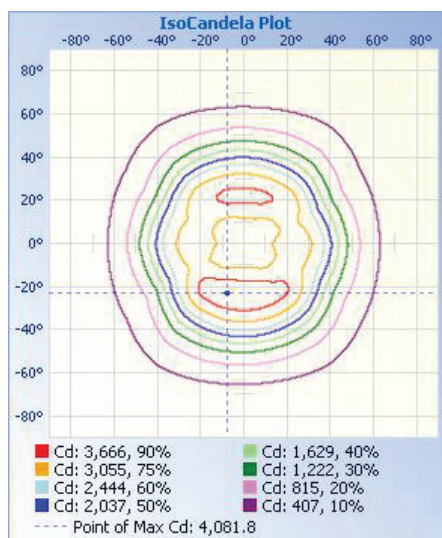

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	10.4 fc	29.6 ft	22.5 ft
34.0ft	2.59 fc	59.1 ft	45.0 ft
51.0ft	1.15 fc	88.7 ft	67.5 ft
68.0ft	0.65 fc	118.3 ft	90.0 ft
85.0ft	0.41 fc	147.8 ft	112.5 ft
102.0ft	0.29 fc	177.4 ft	135.0 ft

■ Vert. Spread: 82.0°
■ Horiz. Spread: 67.0°

ELECTRICAL

Wattage	100W
Voltage	120-277V
Power Factor	0.9
THD	15%
Operating temp	-40 to 60°C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder-coat
Colour	Bronze
IP rating	IP65
Weight	14.33 lbs
Carton qty	1

ACCESSORIES (Ordered Separately)

JL-208	Shorting Cap
--------	--------------

DIMENSIONS

