

# Rotatable Wall Pack

25W | 4000K | 120-277V



Ideal for security lighting, wall washing, flood lighting, and more  
Use as an uplight, downlight, or flood light

Heavy Die Cast Aluminum

LM80 Tested  
CREE Chips

Flexible Light Control



270° Rotatable Module

Superior Anodized  
Paint Finish

Oversized Heat Sink  
for Superior Thermal  
Management



## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	3,324 lm
Efficacy	126.99 lm/W
CCT	4000K
Beam angle	60°
CRI	73.5
Dimmable	No
Rated hours	50,000
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E482965
DLC	PL9NKN9JF8EI

### ILLUMINANCE CONE

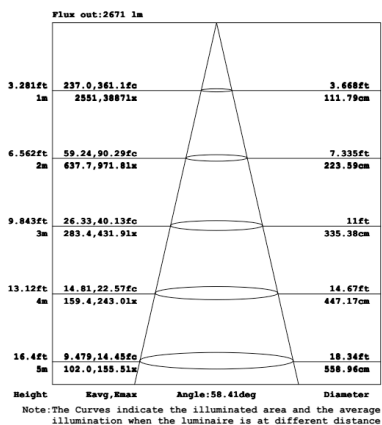

### ELECTRICAL

Wattage	25W
Voltage	120-277V
Power factor	0.9
THD	14.07%
Operating temp	-30° to 45° C

### CONSTRUCTION

Housing	Cast aluminum
Finish	Anodized finish
Colour	Black
IP Rating	IP65
Weight	4.07 lbs
Carton qty	4

### ACCESSORIES (SOLD SEPARATELY)

RWP-EXT-PLATE	Extension Plate
---------------	-----------------



### DIMENSIONS



Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)