

# Rotatable Wall Pack

80W | 5000K | 120-277V



Ideal for security lighting, wall washing, flood lighting, and more  
Use as a flood light - uplight, downlight, or both!

Heavy Die Cast Aluminum

LM80 Tested  
CREE Chips

2 Independent  
Rotatable Modules  
offer flexible light control



270° Rotatable Modules



Superior Anodized  
Paint Finish

Oversized Heat Sink  
for Superior Thermal  
Management

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	10,598 lm
Efficacy	133.36 lm/W
CCT	5000K
Beam angle	60°
CRI	73.6
Dimmable	No
Rated hours	50,000
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E482965
DLC	PLKHX0ZFGF0A

### ILLUMINANCE CONE

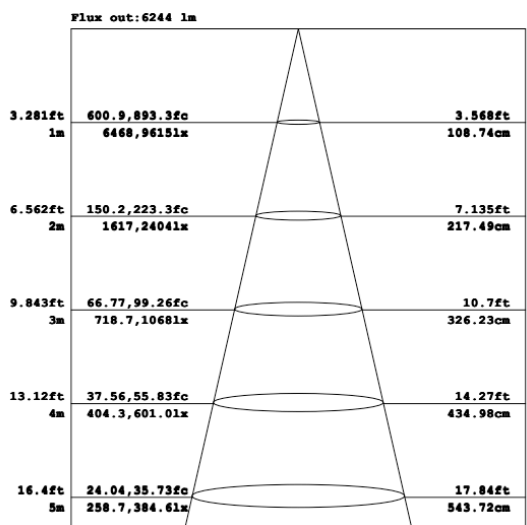

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.94
THD	12.32%
Operating temp	-30° to 45°C

### CONSTRUCTION

Housing	Cast aluminum
Finish	Anodized finish
Colour	Black
IP Rating	IP65
Weight	6.68 lbs
Carton qty	2

### ACCESSORIES (SOLD SEPARATELY)

RWP-EXT-PLATE	Extension Plate
---------------	-----------------



### DIMENSIONS

