


Rotatable Wall Packs

60W | Colour Tunable | 120-277V



Use as an uplight, downlight, or flood light
Ideal for security lighting, wall washing, flood lighting, and more

270° Rotatable Modules

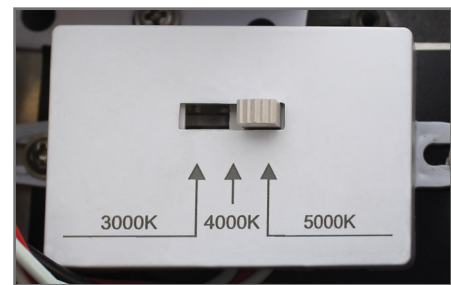

Colour Tunable via DIP Switch
(3000K / 4000K / 5000K)

Oversized Heat Sink
for superior thermal management

Powder Coated Finish
(Black)

Die-cast Aluminum
Construction

0-10V Dimmable
with 4kV surge protection

Generously Sized Driver Box
with multiple entry points on side
and rear. Fits standard junction box

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	7,270.1 lm @ 3000K
Efficacy	126.02 lm/W
CCT	3000K / 4000K / 5000K
CRI	>70
Beam Angle	60°
L70 Life	>54,000 hrs
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLZE6LE4CKA4

ILLUMINANCE AT A DISTANCE

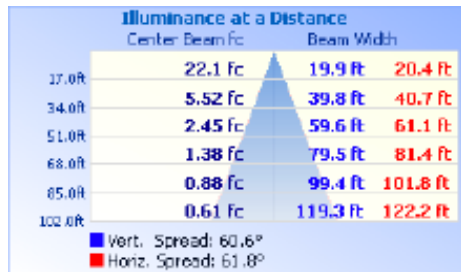

ISOCANDELA PLOT

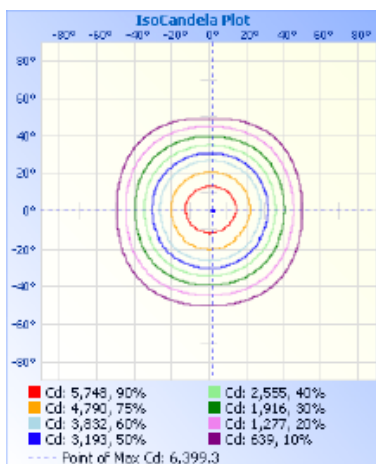


ELECTRICAL

Wattage	60W
Voltage	120-277V
Power Factor	>0.9
THD	<15%
Operating temp	-40 to 45°C

CONSTRUCTION

Housing	Die-cast Aluminum
Finish	Powder Coat
Finish Colour	Black
IP Rating	IP65
Gross Weight	3.05 kg
Carton Qty	2
Carton Dimensions	41.5 x 31 x 32 cm

DIMENSIONS (MM)

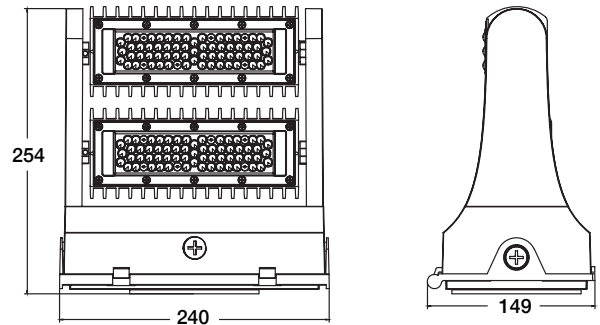

* All specs were tested while the fixture pointed straight down.

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com