

ST4B Linear Strip Light

Power Selectable | Colour Selectable | 120-347V | 4 ft

Quickest row mount fixture on the market!

Ideal for shops, cove lighting, and general area lighting
Ceiling mount or cable mount, linkable, and row mountable

Power Selectable

20W / 30W / 40W

Designed for a Quick
and Easy Installation

open and closes without the use of tools

Colour Selectable

3500K / 4000K / 5000K

Internal Dimming

Light Engine Drops
on Aircraft Cables
for ease of installation

Low Glare
Frosted Lens

Plug & Play Row Mount Kit

Row Mount Kit sold separately





TECHNICAL DATA

LIGHT SPECIFICATIONS


Lumens*	5,184 lm
Efficacy*	131 lm/W
CCT	3500K/4000K/5000K
CRI	86
Beam Angle	120°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year

*Shown at 40W and 3500K


APPROVALS & LISTINGS

cUL	E482965
DLC	S-H9VBGY, S-2I7ENW

ISOCANDELA

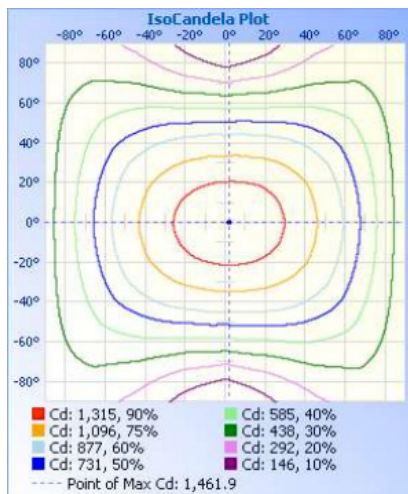

ILLUMINANCE AT A DISTANCE

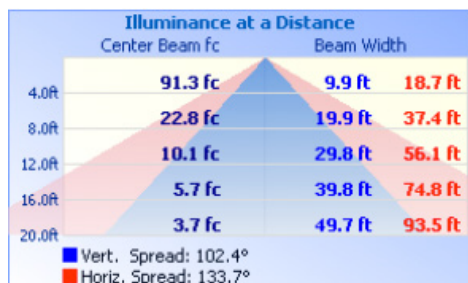

ELECTRICAL

Wattage	20W/30W/40W
Voltage	120-347V
Current	0.40A
Surge Protection	2kV
Auxiliary Output	12V
Power Factor	0.91
THD	20%
Operating Temp	-20 to 45°C

CONSTRUCTION

Housing	Colour Coated Steel Plate
Finish Colour	White
IP Rating	IP20 (Damp Location)

DIMENSIONS & WEIGHTS

Product Dimensions	48.03 x 2.95 x 3.26 in
Fixture Weight	3.13 lbs
Carton Qty	1
Carton Gross Weight	3.68 lbs
Carton Dimensions	48.2 x 3.2 x 3.5 in
Master Carton Qty	8
Master Carton Gross Weight	29.44 lbs
Master Carton Dimensions	49.4 x 13.8 x 7.9 in

ACCESSORIES (SOLD SEPARATELY)

Suspension Kit	ST-SUS-KIT
Connection Bracket	ST-CONN-BKT
Microwave Motion Sensor (12 ft max)	MS02-MW-HW-DC
Microwave Motion Sensor (25 ft max)	MS03-MW-HW-DC
Row Mounting Connector	ST-RM4
Motion Sensor Remote Control	MS02-RC

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833