



 CSCLED

# T-GRID LIGHTING


TBAR2-DM-35K

TBAR2-DM-40K

TBAR4-DM-35K

TBAR4-DM-40K

CSC LED T-GRID lighting with a frosted lens has a unique 3-sided design that allows light to diffuse for a direct and indirect lighting combination. The 120° beam angle aids in creating an architectural statement while distributing the lumens over the entire space.

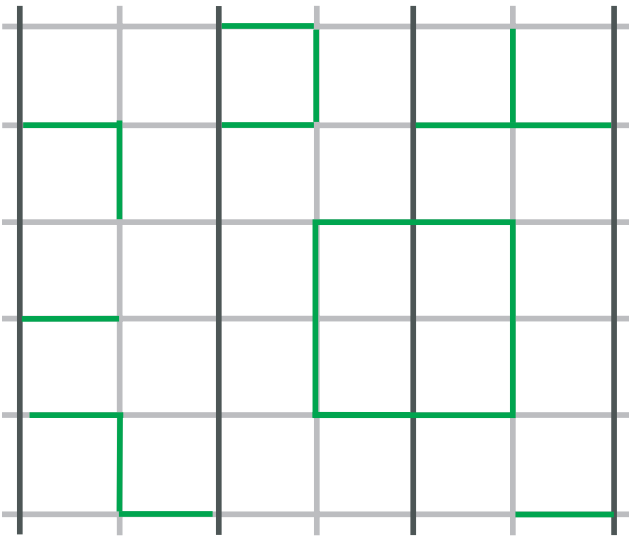

- Examples of configurations
- Possible positions for T-BAR LED light modules
- One-piece main runner cannot be replaced

## FLEXIBLE LIGHTING SOLUTIONS


Design a custom pattern for your space!

CSC LED T-GRID lighting can be installed in many configurations by replacing any of the cross tees between the main runners of the grid ceiling assembly.


These configurations include "L" ,"T" ,"+" ,"□" and more.



## DIMENSIONS

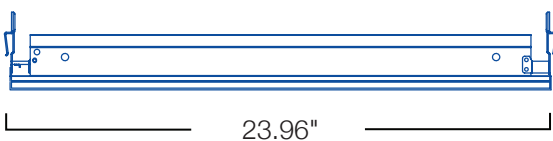


2 FT Models

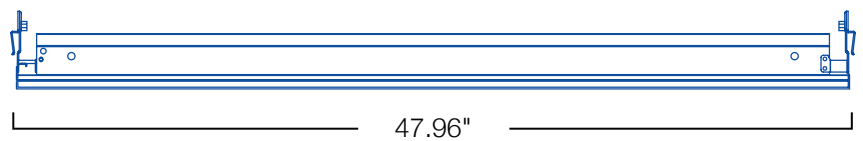

4 FT Models

# SPECIFICATIONS



**Remote Driver with RJ45 Terminal**  
saves labour costs and allows for quick and easy installation

**Frosted Lens and 8 ft Power Cable with RJ45 Jack**



**Seamless Integration**  
into suspended ceilings allows unique and elegant architectural lighting designs

**Slim Profile**  
0.48" thickness

15/16"

## APPLICATIONS

A flexible lighting solution for commercial and institutional buildings such as office buildings, schools, and other spaces that can benefit from a unique and elegant architectural lighting design.

## DRIVER

T-GRID lighting can be parallel connected up to 6' (2' fixture) and 12' (4' fixture) max per power supply. Max distance from fixtures to power supply is 8' with 24 AWG wire with RJ45 terminal.

## MOUNTING

Universal mounting brackets are widely compatible with various T-GRIDS and are easy to install in standard 15/16" suspension systems.

Order Code	Length	Grid Type	Wattage	CCT	Voltage	Lumens	Efficacy	Beam Angle
TBAR2-DM-35K	2 FT	15/16"	10W	3500K	120-277V	1,300 lm	130 lm/W	120°
TBAR2-DM-40K	2 FT	15/16"	10W	4000K	120-277V	1,300 lm	130 lm/W	120°
TBAR4-DM-35K	4 FT	15/16"	20W	3500K	120-277V	2,600 lm	130 lm/W	120°
TBAR4-DM-40K	4 FT	15/16"	20W	4000K	120-277V	2,600 lm	130 lm/W	120°

Power Supplies required for connecting 3 pieces of T-Grid Lighting (sold separately)	
TBAR-PS-30W	Power Supply for 2' T-Grid Lighting (Powers 3 pieces)
TBAR-PS-60W	Power Supply for 4' T-Grid Lighting (Powers 3 pieces)



ADDITIONAL T-GRID SIZES AVAILABLE THROUGH SPECIAL ORDER.  
Email info@csc-led.com or talk to your local sales agent to learn more.



## Industrial and Commercial LED Lighting

1-888-900-9885 | [info@csc-led.com](mailto:info@csc-led.com) | [www.csc-led.com](http://www.csc-led.com)

### HEAD OFFICE

8-540 Jamieson Parkway  
Cambridge, ON N3C 0G5  
[orders@csc-led.com](mailto:orders@csc-led.com)

### WESTERN CANADA

121-1647 Broadway St.  
Port Coquitlam, BC V3C 6P8  
[ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)

## SALES AGENCIES

### BRITISH COLUMBIA

Ken Watt & Associates  
P: (604) 576-2838  
[www.kenwattassoc.com](http://www.kenwattassoc.com)

### MANITOBA

TMC Sales  
P: (204) 837-5036  
[www.tmcsales.ca](http://www.tmcsales.ca)

### ALBERTA / SASKATCHEWAN

Sensible Adaptive Solutions  
P: (403) 519-4209  
(403) 869-8252  
[www.sensibleadaptive.com](http://www.sensibleadaptive.com)

### ONTARIO

Roney Marketing Ltd.  
P: (905) 595-1344  
[www.roneymk.com](http://www.roneymk.com)

### NEWFOUNDLAND AND LABRADOR

RWM Enterprises  
P: (709) 682-4012

### QUÉBEC

Éclairage Hi-Tech Inc.  
P: (450) 442-7604  
[www.eclairagehitech.com](http://www.eclairagehitech.com)