

Direct/Indirect Panel Light

40W | 3500K | 120-277V

Ideal for offices, conference rooms, retail stores, reception areas, hallways, and educational institutions

Low profile suspended luminaire

Fully adjustable aircraft cable (1m)

Unique design
uplight and downlight
(50% up, 50% down)

Built-in surge protection
with 0-10V dimming

Canopy covers
included (2)

Suspends
from typical octagon box

Power connection
on each end
for row mounting
(bridge kit included)

Built-in surge
protection

Performance
engineered optical lens
transparent when off

Complete with: 1m aircraft cable (x2), white canopy octagon cover, canopy covers (x2), and bridging kit (for row mounting)

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,600 lm
Efficacy	110 lm/W
CCT	3500K
CRI	>82
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E491106
-----	---------

DIMENSIONS

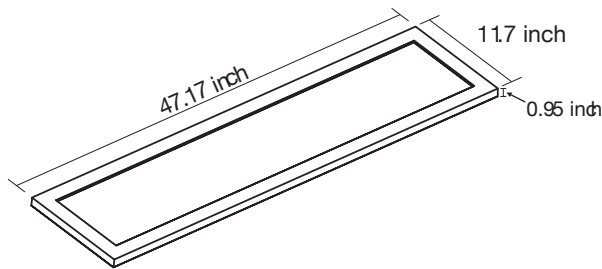

ISOLUX PLOT

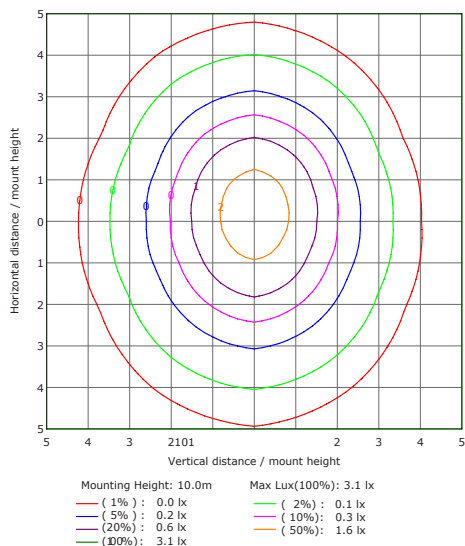

ELECTRICAL

Wattage	40W
Voltage	120-277V
Power factor	>0.9
THD	>20%
Operating temp	-20° to 40°C

CONSTRUCTION


Housing	Aluminum
Finish	White
Rating	IP20

COMPLETE WITH

1m aircraft cable	2 qty
Canopy covers	2 qty
White canopy octagon cover	1 qty
Bridging kit (for row mounting)	1 qty

Note: Power cable not included.
(white fixture cable is recommended)

LUMINOUS INTENSITY DISTRIBUTION CURVE

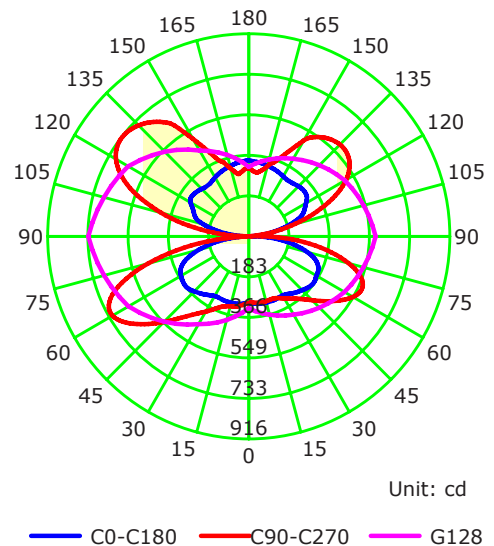

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com