

# Volumetric Troffer

30W | 4000K | 2x2



Suitable for use in commercial lighting areas, such as offices, retail spaces, hallways, and hospitality areas



Damp Location Rated

## TECHNICAL DATA




## LIGHT SPECIFICATIONS

Lumens	3,823 lm
Efficacy	129.68 lm/W
CCT	4000K
CRI	82.8
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	5-year


## APPROVALS AND LISTINGS

cUL	E491106
DLC Premium	PRVQOBIO

## SPECTRAL POWER DISTRIBUTION

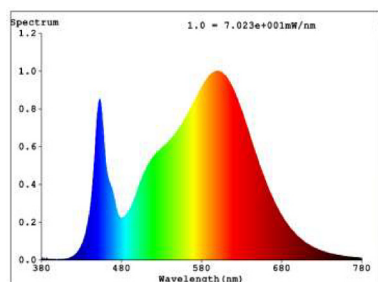

## CHROMATICITY DIAGRAM

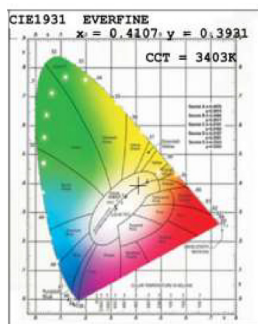

## ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
4.0ft	85.1 fc	9.8 ft 11.7 ft
8.0ft	21.3 fc	19.6 ft 23.5 ft
12.0ft	9.5 fc	29.5 ft 35.2 ft
16.0ft	5.3 fc	39.3 ft 46.9 ft
20.0ft	3.4 fc	49.1 ft 58.7 ft

■ Vert. Spread: 101.7°  
 ■ Horiz. Spread: 111.4°


## ELECTRICAL

Wattage	30W
Voltage	100-347V
Power factor	0.90
THD	11.9 %
Operating temp	-20° to 40°C

## CONSTRUCTION

Housing	Steel
Finish	White
IP Rating	IP40
Weight	11.6 lbs
Carton qty	12

## ISOCANDELA PLOT

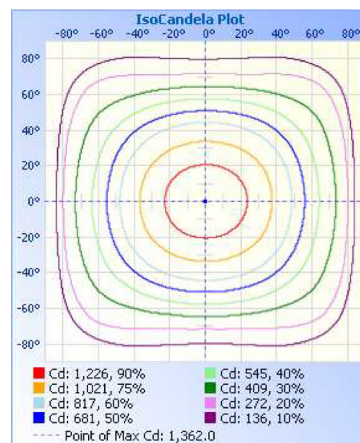

## DIMENSIONS

