

# Volumetric Troffer

Wattage Selectable | Colour Tunable | 120-347V

Ideal for commercial lighting areas such as offices, retail spaces, hallways, healthcare applications, and more



Optional Accesories (sold separately):  
Emergency LED Driver



BLD-YT08D

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	4,714 lms @ 3000K
Efficacy	124 lm/W
CCT	3000K / 3500K / 4000K
CRI	86
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year

### APPROVALS AND LISTINGS

cETL	5000444
DLC	S-6KDAG7

### ILLUMINANCE AT A DISTANCE

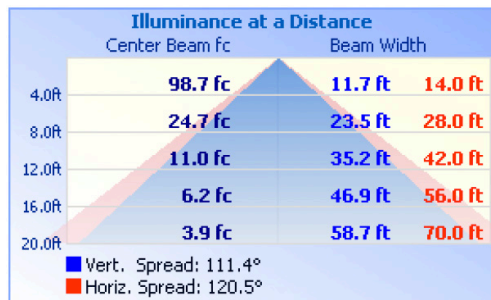

### ELECTRICAL

Wattage	20W/30W/40W
Voltage	120-347V
Power Factor	0.93
THD	17%
Operating Temp	-20 to 40°C

### CONSTRUCTION

Housing	Metal
Cover	Polycarbonate
Finish	White
IP Rating	IP20
Net Weight	5.2 kg
Gross Weight	6.4 kg
Carton Qty	2
Carton Dimensions	648 x 140 x 653 mm

### ACCESSORIES (Ordered Separately)

Emergency LED Driver	BLD-YT08D
----------------------	-----------

### DIMENSIONS

### ISOCANDELA PLOT

