

# Volumetric Troffer

40W | 4000K | 2x4



Suitable for use in commercial lighting areas, such as offices, retail spaces, hallways, and hospitality areas



Damp Location Rated

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	5,115 lm
Efficacy	128 lm/W
CCT	4000K
CRI	82.9
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	5-year


### APPROVALS AND LISTINGS

cUL	E491106
DLC Premium	PDBLZHW6

### SPECTRAL POWER DISTRIBUTION

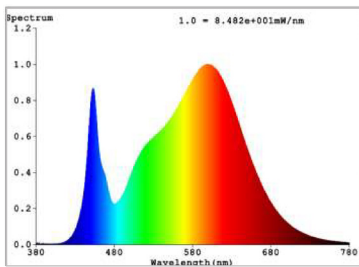

### CHROMATICITY DIAGRAM

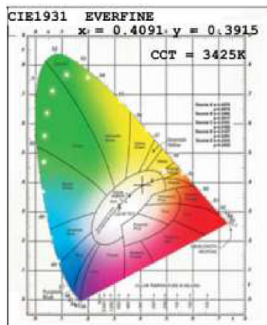

### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
4.0R	113.3 fc	10.0 ft	11.6 ft
8.0R	28.3 fc	20.0 ft	23.2 ft
12.0R	12.6 fc	30.0 ft	34.8 ft
16.0R	7.1 fc	40.0 ft	46.4 ft
20.0R	4.5 fc	50.0 ft	58.0 ft

■ Vert. Spread: 102.7°  
■ Horiz. Spread: 110.8°


### ELECTRICAL

Wattage	40W
Voltage	100-347V
Power factor	0.88
THD	17.4 %
Operating temp	-20° to 40°C


### CONSTRUCTION

Housing	Steel
Finish	White
IP Rating	IP40
Weight	22.2 lbs
Carton qty	12

### ISOCANDELA PLOT

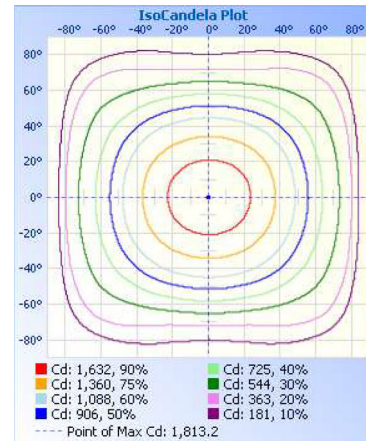

### DIMENSIONS

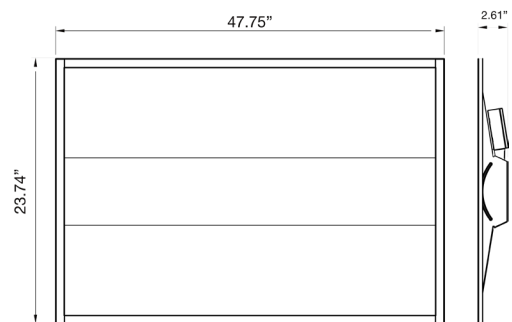

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)