

# NEMA 4X Vapour Tight

100W | 5000K | 120-347V | 4 ft




Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



Low Glare  
Frosted Lens

120-347V Driver

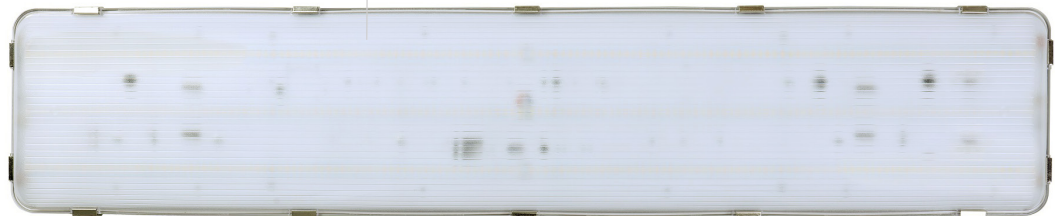

Conduit Entry  
on both ends

304 Stainless Steel  
Locking Buckles

One Piece  
Gear Tray  
for quick access  
to driver and  
accessories



Accessories (Ordered Separately):  
Motion Sensor (STVT-IMS or VTHB-IMS)  
See pg. 2 for motion sensor details



STVT-IMS



VTHB-IMS

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	13,750 lm
Efficacy	137.5 lm/W
CCT	5000K
CRI	83
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year

### APPROVALS AND LISTINGS


ETL	5001780
DLC Premium	PLAY2ISA5LR2

### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
3.3ft	426 fc	7.9 ft	9.0 ft
6.7ft	103 fc	16.0 ft	18.2 ft
10.0ft	46.4 fc	23.8 ft	27.2 ft
13.3ft	26.2 fc	31.7 ft	36.2 ft
16.7ft	16.6 fc	39.8 ft	45.5 ft
20.0ft	11.6 fc	47.6 ft	54.4 ft

■ Vert. Spread: 100.0°  
■ Horiz. Spread: 107.4°

### ISOCANDELA

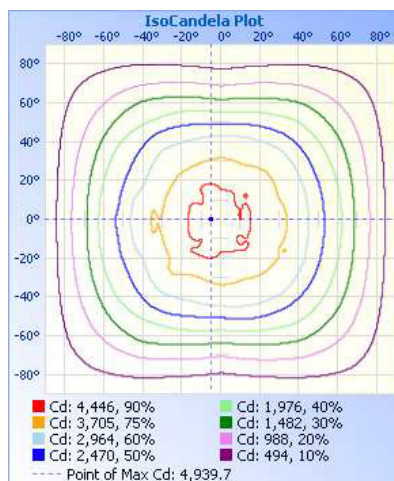

### ELECTRICAL

Wattage	100W
Voltage	120-347V
Power Factor	0.92
THD	12.13%
Operating Temp	-35 to 40°C

### CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1270 x 254 x 115 mm
Ctn Qty	1

### ACCESSORIES (Sold Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

STVT-IMS can be mounted at a max height of 4 metres  
 VTHB-IMS can be mounted over 4 meters high (max 10m)




VTHB-IMS



STVT-IMS

### DIMENSIONS

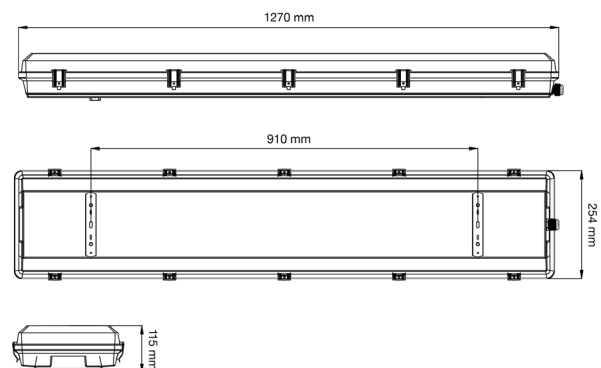

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | [orders@csc-led.com](mailto:orders@csc-led.com) | (519) 880 - 9833