

# NEMA 4X Vapour Tight

150W | 5000K | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



Low Glare  
Frosted Lens

120-347V Driver



304 Stainless Steel  
Locking Buckles

One Piece  
Gear Tray  
for quick access  
to driver and  
accessories

Conduit Entry  
on both ends



Accessories (Ordered Separately):  
Motion Sensor (STVT-IMS or VTHB-IMS)  
See pg. 2 for motion sensor details



STVT-IMS



VTHB-IMS

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	20,400 lm
Efficacy	136 lm/W
CCT	5000K
CRI	83
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


### APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	PLYNPQ9V2UNZ

### ILLUMINANCE AT A DISTANCE

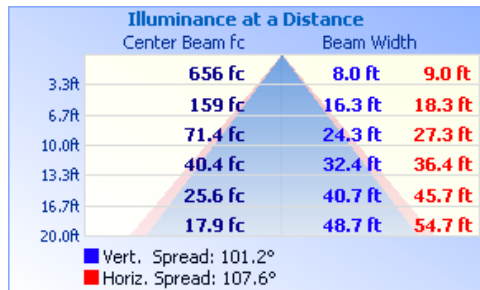

### ISOCANDELA

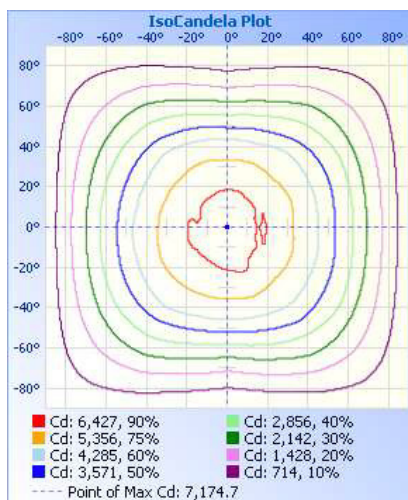

### ELECTRICAL

Wattage	150W
Voltage	120-347V
Power Factor	0.9
THD	18%
Operating Temp	-35 to 40°C

### CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1270 x 254 x 115 mm
Ctn Qty	1

### ACCESSORIES (Sold Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

STVT-IMS can be mounted at a max height of 4 metres  
 VTHB-IMS can be mounted over 4 meters high (max 10m)



VTHB-IMS



STVT-IMS

### DIMENSIONS

