

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V | 4ft

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



Colour Selectable
3500K / 4000K / 5000K

Power Selectable
20W / 28W / 35W

One Piece Gear Tray
for quick access to driver
and accessories

Stainless Steel
Spring Clips



120-347V Driver

Polycarbonate
Low Glare Lens



1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC

BLD-YT08D

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,550 lm
Efficacy	130 lm/W
CCT	3500K / 4000K / 5000K
CRI	84
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	S-AR3ION, S-VKND80

ISOCANDELA PLOT

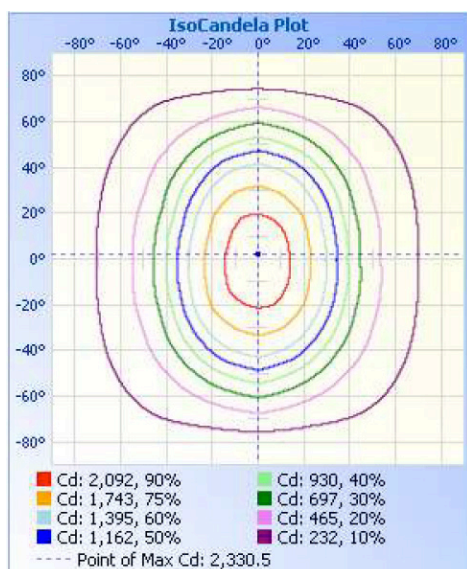

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
4.0ft	145.1 fc	8.9 ft	5.6 ft
8.0ft	36.3 fc	17.8 ft	11.1 ft
12.0ft	16.1 fc	26.7 ft	16.7 ft
16.0ft	9.1 fc	35.6 ft	22.2 ft
20.0ft	5.8 fc	44.5 ft	27.8 ft

■ Vert. Spread: 96.1°
■ Horiz. Spread: 69.5°

ELECTRICAL

Wattage	20W / 28W / 35W
Voltage	120-347V
Current	0.5A
Power Factor	0.93
THD	15.1%
Operating Temp	-40°C to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66

DIMENSIONS AND WEIGHTS

Fixture Weight	4.9 lbs
Fixture Dimensions	46.7 x 4.2 x 3.3 in
Master Carton Qty	4
Master Carton Gross Weight	24.8 lbs
Master Carton Dimensions	47.5 x 9.6 x 8.4 in
Carton Qty	1
Carton Gross Weight	5.6 lbs
Carton Dimensions	46.8 x 4.7 x 3.6 in

DIMENSIONAL DRAWING (IN)

