

# NEMA 4X Vapour Tight


46W | Colour Tunable | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments




NEMA 4X

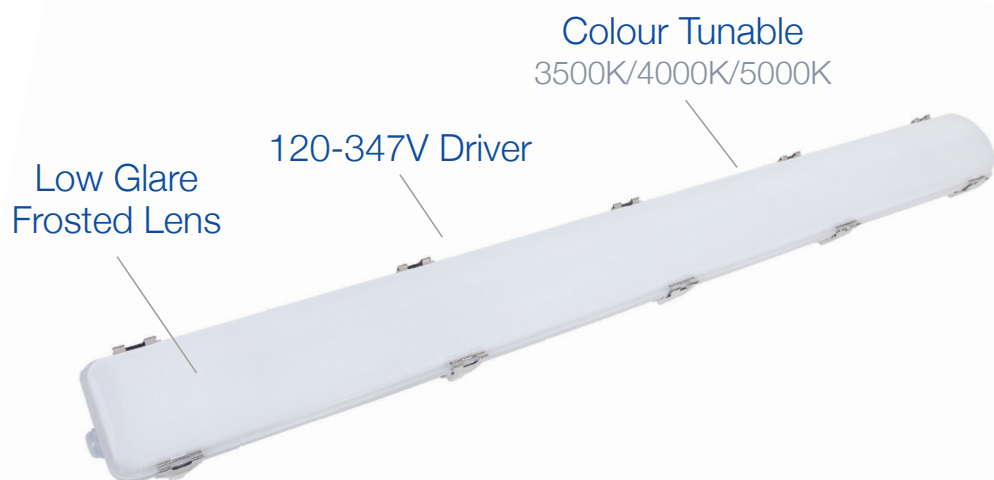

Conduit Entry  
on both ends

Installation Brackets  
can be slid anywhere along  
entire surface for matching  
joist pattern

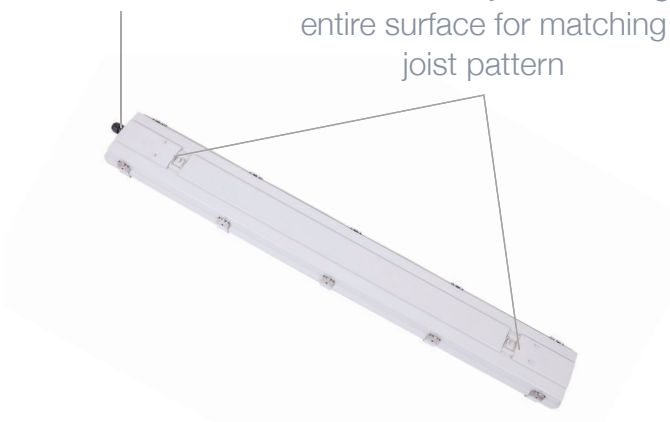

304 Stainless  
Steel Locking  
Buckles

One Piece  
Gear Tray  
for quick access  
to driver and  
accessories



Accessories (Ordered Separately):  
Motion Sensor (STVT-IMS or VTHB-IMS)



STVT-IMS



VTHB-IMS

## TECHNICAL DATA




## LIGHT SPECIFICATIONS

Lumens	5,950 lm
Efficacy	129 lm/W
CCT	3500K, 4000K, 5000K
CRI	84.7
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


## APPROVALS AND LISTINGS

ETL	5001780
DLC	S-ZHEC9A

## DIMENSIONS

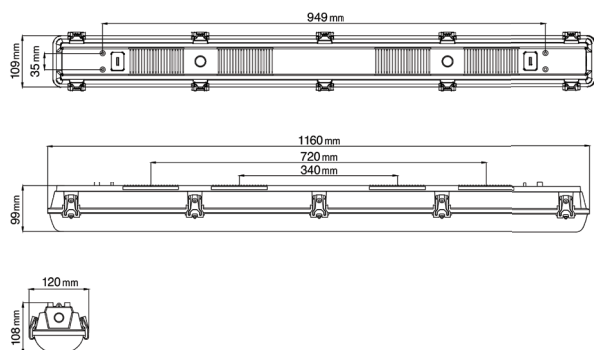

## ISOCANDELA

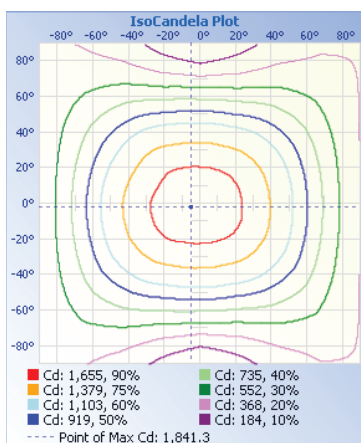

## ELECTRICAL

Wattage	46W
Voltage	120-347V
Power Factor	0.99
THD	6.33%
Operating Temp	-35 to 40°C

## CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1160 x 120 x 109 mm
Ctn Qty	4
Carton Dimensions	382 x 382 x 196 mm

## ACCESSORIES (Ordered Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

NOTE: VTHB-IMS can be mounted over 4 metres.  
STVT-IMS can be mounted at a max height of 4 metres.



VTHB-IMS



STVT-IMS

## ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width
3.3ft	169 fc	8.8 ft 12.5 ft
6.7ft	40.9 fc	17.8 ft 25.3 ft
10.0ft	18.4 fc	26.5 ft 37.7 ft
13.3ft	10.4 fc	35.3 ft 50.2 ft
16.7ft	6.59 fc	44.3 ft 63.0 ft
20.0ft	4.59 fc	53.1 ft 75.5 ft

■ Vert. Spread: 106.0°  
■ Horiz. Spread: 124.2°