

NEMA 4X Vapour Tight

65W | CCT Tunable | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



Colour Tunable
3500K/4000K/5000K

120-347V Driver

Low Glare
Frosted Lens

Installation Brackets
can be slid anywhere along
entire surface for matching
joist pattern

Conduit Entry
on both ends



304 Stainless
Steel Locking
Buckles

One Piece
Gear Tray
for quick access
to driver and
accessories



Accessories (Ordered Separately):
Motion Sensor (STVT-IMS or VTHB-IMS)
See pg. 2 for motion sensor details



STVT-IMS



VTHB-IMS

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	8,643 lm
Efficacy	126.87 lm/W
CCT	3500K / 4000K / 5000K
CRI	84.6
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

ETL	5001780
DLC	S-KDT29X

ILLUMINANCE AT A DISTANCE

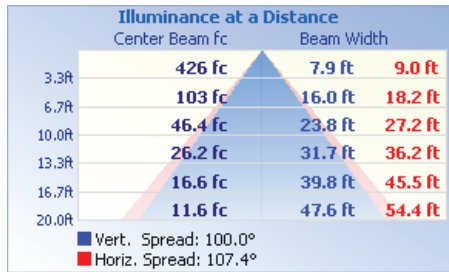

ISOCANDELA

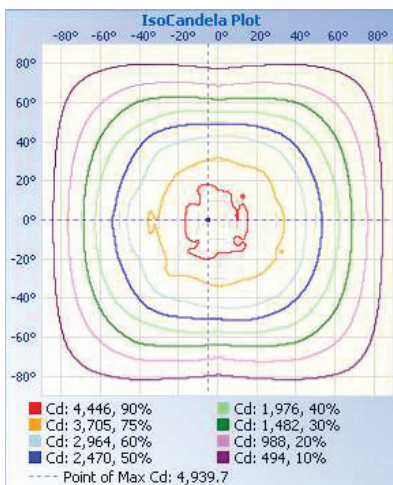

ELECTRICAL

Wattage	65W
Voltage	120-347V
Power Factor	0.96
THD	14.38%
Operating Temp	-35 to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1160 x 120 x 109 mm
Ctn Qty	4
Carton Dimensions	382 x 382 x 196 mm

ACCESSORIES (Sold Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

STVT-IMS can be mounted at a max height of 4 metres
 VTHB-IMS can be mounted over 4 meters high (max 10m)




VTHB-IMS



STVT-IMS

DIMENSIONS

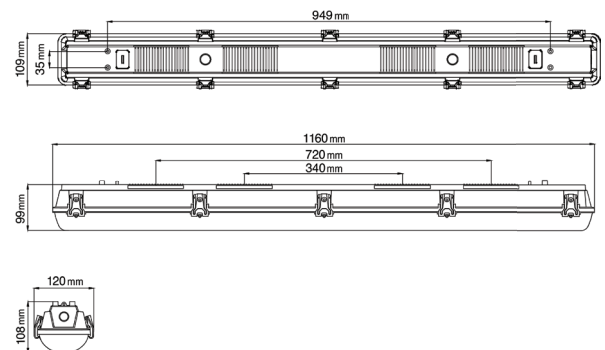

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com